

TypeScript

Notes for Professionals

Chapter 3: Classes

TypeScript, like ES6, supports object-oriented programming using classes. This contrasts with earlier versions, which only supported prototype-based inheritance chains. The class support in TypeScript is similar to that of languages like Java and C#. In that classes inherit from other classes, while objects are instantiated as class instances.

Also similar to those languages, TypeScript classes may implement interfaces or make use of

Section 3.1: Abstract Classes

```
abstract class Machine {
    constructor(public manufacturer: string) {}

    // An abstract class can define methods of its own, or ...
    summary(): string {
        return `${this.manufacturer} makes this machine.`;
    }

    // Reuse by inheriting classes to implement methods
    abstract moreInfo(): string;

    class Car extends Machine {
        constructor(public manufacturer: string, public position: number, protected
            move() {
                this.position += this.speed;
            }
        moreInfo(): string {
            return `This is a car located at ${this.position} and going
                ${this.speed} km/h`;
        }
    }
}

let myCar = new Car('Konda', 10, 70);
myCar.move(); // position is now 80
console.log(myCar.summary()); // prints "Konda makes this machine
// and it's currently moving at 70 km/h"
console.log(myCar.moreInfo()); // prints "This is a car located at
// 80 and going 70 km/h"
```

Abstract classes are base classes from which other classes can extend. They cannot be instantiated directly:

- They can implement methods of their own.
- They can define methods that inheriting classes must implement.

For this reason, abstract classes can conceptually be considered a combination of an interface and a concrete class.

Section 3.2: Simple class

```
class Car {
```

TypeScript Notes for Professionals

Chapter 6: Functions

Section 6.1: Optional and Default Parameters

Optional Parameters

In TypeScript, every parameter is assumed to be required by the function. You can add a ? at the end of a parameter name to set it as optional.

For example, the lastName parameter of this function is optional:

```
function buildName(firstName: string, lastName?: string): string {
    // ...
}
```

Optional parameters must come after all non-optional parameters:

```
function buildName(firstName: string, lastName: string): string {
    // ...
}
```

Default Parameters

If the user passes undefined or doesn't specify an argument, the default value will be assigned. These are called default-initialized parameters.

For example, "Smith" is the default value for the lastName parameter:

```
function buildName(firstName: string, lastName = "Smith"): string {
    // ...
}

buildName('foo', 'bar') // firstName == 'foo', lastName == 'bar'
buildName('foo') // firstName == 'foo', lastName == Smith
buildName() // firstName == 'foo', lastName == Smith
```

Section 6.2: Function as a parameter

Suppose we want to receive a function as a parameter, we can do it like this:

```
function foo(otherFunc: Function): void {
    // ...
}
```

If we want to receive a constructor as a parameter:

```
function foo(constructorFunc: () => Constructor): void {
    // ...
}

function foo(constructorWithParamsFunc: () => Constructor): void {
    // ...
}
```

Or to make it easier to read we can define an interface describing the constructor:

```
interface IConstructor {
    new(...args: any[]);
}

TypeScript Notes for Professionals
```

Chapter 21: TypeScript basic examples

Section 21.1: 1 basic class inheritance example using extends

```
class Car {
    name: string;
    engineCapacity: string;

    constructor(name: string, engineCapacity: string) {
        this.name = name;
        this.engineCapacity = engineCapacity;
    }

    describeCar(): void {
        console.log(`A ${this.name} car comes with ${this.engineCapacity} displacement`);
    }
}

new Car('Merut', '1500cc').describeCar();
```

HondaCar extends the existing generic Car class and adds new property,

```
class HondaCar extends Car {
    seatingCapacity: number;

    constructor(name: string, engineCapacity: string, seatingCapacity: number) {
        super(name, engineCapacity);
        this.seatingCapacity = seatingCapacity;
    }

    describeHondaCar(): void {
        super.describeCar();
        console.log(`This car comes with seating capacity of ${this.seatingCapacity}`);
    }
}

new HondaCar('Honda Jazz', '1500cc', 4).describeHondaCar();
```

Section 21.2: 2 static class variable example - count how many time method is being invoked

Here countInstance is a static class variable

```
class StaticTest {
    static countInstance: number = 0;
    constructor() {
        StaticTest.countInstance++;
    }
}

new StaticTest();
new StaticTest();
console.log(StaticTest.countInstance);
```

TypeScript Notes for Professionals

80+ pages

of professional hints and tricks

Contents

About	1
Chapter 1: Getting started with TypeScript	2
Section 1.1: Installation and setup	2
Section 1.2: Basic syntax	4
Section 1.3: Hello World	5
Section 1.4: Running TypeScript using ts-node	5
Section 1.5: TypeScript REPL in Node.js	6
Chapter 2: Importing external libraries	8
Section 2.1: Finding definition files	8
Section 2.2: Importing a module from npm	9
Section 2.3: Using global external libraries without typings	9
Section 2.4: Finding definition files with typescript 2.x	9
Chapter 3: Classes	11
Section 3.1: Abstract Classes	11
Section 3.2: Simple class	11
Section 3.3: Basic Inheritance	12
Section 3.4: Constructors	12
Section 3.5: Accessors	13
Section 3.6: Transpilation	14
Section 3.7: Monkey patch a function into an existing class	15
Chapter 4: Strict null checks	16
Section 4.1: Strict null checks in action	16
Section 4.2: Non-null assertions	16
Chapter 5: Using Typescript with React (JS & native)	18
Section 5.1: ReactJS component written in TypeScript	18
Section 5.2: Typescript & react & webpack	19
Chapter 6: Functions	21
Section 6.1: Optional and Default Parameters	21
Section 6.2: Function as a parameter	21
Section 6.3: Functions with Union Types	23
Section 6.4: Types of Functions	23
Chapter 7: Interfaces	24
Section 7.1: Extending Interface	24
Section 7.2: Class Interface	24
Section 7.3: Using Interfaces for Polymorphism	25
Section 7.4: Generic Interfaces	26
Section 7.5: Add functions or properties to an existing interface	27
Section 7.6: Implicit Implementation And Object Shape	27
Section 7.7: Using Interfaces to Enforce Types	28
Chapter 8: Using TypeScript with webpack	29
Section 8.1: webpack.config.js	29
Chapter 9: Generics	30
Section 9.1: Generic Interfaces	30
Section 9.2: Generic Class	30
Section 9.3: Type parameters as constraints	31
Section 9.4: Generics Constraints	31

Section 9.5: Generic Functions	32
Section 9.6: Using generic Classes and Functions:	32
Chapter 10: TypeScript Core Types	33
Section 10.1: String Literal Types	33
Section 10.2: Tuple	36
Section 10.3: Boolean	36
Section 10.4: Intersection Types	37
Section 10.5: Types in function arguments and return value. Number	37
Section 10.6: Types in function arguments and return value. String	38
Section 10.7: const Enum	38
Section 10.8: Number	39
Section 10.9: String	39
Section 10.10: Array	40
Section 10.11: Enum	40
Section 10.12: Any	40
Section 10.13: Void	40
Chapter 11: Integrating with Build Tools	41
Section 11.1: Browserify	41
Section 11.2: Webpack	41
Section 11.3: Grunt	42
Section 11.4: Gulp	42
Section 11.5: MSBuild	43
Section 11.6: NuGet	43
Section 11.7: Install and configure webpack + loaders	44
Chapter 12: Publish TypeScript definition files	45
Section 12.1: Include definition file with library on npm	45
Chapter 13: Class Decorator	46
Section 13.1: Generating metadata using a class decorator	46
Section 13.2: Passing arguments to a class decorator	46
Section 13.3: Basic class decorator	47
Chapter 14: tsconfig.json	49
Section 14.1: Create TypeScript project with tsconfig.json	49
Section 14.2: Configuration for fewer programming errors	50
Section 14.3: compileOnSave	51
Section 14.4: Comments	51
Section 14.5: preserveConstEnums	52
Chapter 15: Mixins	53
Section 15.1: Example of Mixins	53
Chapter 16: Enums	54
Section 16.1: Enums with explicit values	54
Section 16.2: How to get all enum values	55
Section 16.3: Extending enums without custom enum implementation	55
Section 16.4: Custom enum implementation: extends for enums	55
Chapter 17: TypeScript with AngularJS	57
Section 17.1: Directive	57
Section 17.2: Simple example	58
Section 17.3: Component	58
Chapter 18: TypeScript with SystemJS	60
Section 18.1: Hello World in the browser with SystemJS	60

Chapter 19: Unit Testing	63
Section 19.1: tape	63
Section 19.2: jest (ts-jest)	63
Section 19.3: Alsatian	66
Section 19.4: chai-immutable plugin	66
Chapter 20: TSLint - assuring code quality and consistency	68
Section 20.1: Configuration for fewer programming errors	68
Section 20.2: Installation and setup	68
Section 20.3: Sets of TSLint Rules	69
Section 20.4: Basic tslint.json setup	69
Section 20.5: Using a predefined ruleset as default	69
Chapter 21: TypeScript basic examples	71
Section 21.1: 1 basic class inheritance example using extends and super keyword	71
Section 21.2: 2 static class variable example - count how many time method is being invoked	71
Chapter 22: User-defined Type Guards	72
Section 22.1: Type guarding functions	72
Section 22.2: Using instanceof	73
Section 22.3: Using typeof	73
Chapter 23: How to use a javascript library without a type definition file	75
Section 23.1: Make a module that exports a default any	75
Section 23.2: Declare an any global	75
Section 23.3: Use an ambient module	76
Chapter 24: Modules - exporting and importing	77
Section 24.1: Hello world module	77
Section 24.2: Re-export	77
Section 24.3: Exporting/Importing declarations	79
Chapter 25: Why and when to use TypeScript	80
Section 25.1: Safety	80
Section 25.2: Readability	80
Section 25.3: Tooling	80
Chapter 26: Debugging	81
Section 26.1: TypeScript with ts-node in WebStorm	81
Section 26.2: TypeScript with ts-node in Visual Studio Code	82
Section 26.3: JavaScript with SourceMaps in Visual Studio Code	83
Section 26.4: JavaScript with SourceMaps in WebStorm	83
Chapter 27: Arrays	85
Section 27.1: Finding Object in Array	85
Chapter 28: Typescript-installing-typescript-and-running-the-typescript-compiler-tsc	86
Section 28.1: Steps	86
Chapter 29: Configure typescript project to compile all files in typescript.	88
Section 29.1: Typescript Configuration file setup	88
Chapter 30: Using Typescript with RequireJS	90
Section 30.1: HTML example using requireJS CDN to include an already compiled TypeScript file	90
Section 30.2: tsconfig.json example to compile to view folder using requireJS import style	90
Credits	91
You may also like	93

About

Please feel free to share this PDF with anyone for free,
latest version of this book can be downloaded from:
<http://GoalKicker.com/TypeScriptBook>

This *TypeScript Notes for Professionals* book is compiled from [Stack Overflow Documentation](#), the content is written by the beautiful people at Stack Overflow. Text content is released under Creative Commons BY-SA, see credits at the end of this book whom contributed to the various chapters. Images may be copyright of their respective owners unless otherwise specified

This is an unofficial free book created for educational purposes and is not affiliated with official TypeScript group(s) or company(s) nor Stack Overflow. All trademarks and registered trademarks are the property of their respective company owners

The information presented in this book is not guaranteed to be correct nor accurate, use at your own risk

Please send feedback and corrections to web@petercv.com

Chapter 1: Getting started with TypeScript

Version	Release Date
2.4.1	2017-06-27
2.3.2	2017-04-28
2.3.1	2017-04-25
2.3.0 beta	2017-04-04
2.2.2	2017-03-13
2.2	2017-02-17
2.1.6	2017-02-07
2.2 beta	2017-02-02
2.1.5	2017-01-05
2.1.4	2016-12-05
2.0.8	2016-11-08
2.0.7	2016-11-03
2.0.6	2016-10-23
2.0.5	2016-09-22
2.0 Beta	2016-07-08
1.8.10	2016-04-09
1.8.9	2016-03-16
1.8.5	2016-03-02
1.8.2	2016-02-17
1.7.5	2015-12-14
1.7	2015-11-20
1.6	2015-09-11
1.5.4	2015-07-15
1.5	2015-07-15
1.4	2015-01-13
1.3	2014-10-28
1.1.0.1	2014-09-23

Section 1.1: Installation and setup

Background

TypeScript is a typed superset of JavaScript that compiles directly to JavaScript code. TypeScript files commonly use the `.ts` extension. Many IDEs support TypeScript without any other setup required, but TypeScript can also be compiled with the TypeScript Node.JS package from the command line.

IDEs

Visual Studio

- Visual Studio [2015](#) includes TypeScript.
- Visual Studio [2013 Update 2](#) or later includes TypeScript, or you can [download TypeScript for earlier versions](#).

Visual Studio Code

- [Visual Studio Code](#) (`vscode`) provides contextual autocomplete as well as refactoring and debugging tools for TypeScript. `vscode` is itself implemented in TypeScript. Available for Mac OS X, Windows and Linux.

WebStorm

- [WebStorm 2016.2](#) comes with TypeScript and a built-in compiler. [Webstorm is not free]

IntelliJ IDEA

- [IntelliJ IDEA 2016.2](#) has support for Typescript and a compiler via a [plugin](#) maintained by the Jetbrains team. [IntelliJ is not free]

Atom & atom-typescript

- [Atom](#) supports TypeScript with the [atom-typescript](#) package.

Sublime Text

- [Sublime Text](#) supports TypeScript with the [typescript](#) package.

Installing the command line interface

Install Node.js

Install the npm package globally

You can install TypeScript globally to have access to it from any directory.

```
npm install -g typescript
```

or

Install the npm package locally

You can install TypeScript locally and save to package.json to restrict to a directory.

```
npm install typescript --save-dev
```

Installation channels

You can install from:

- Stable channel: npm `install` typescript
- Beta channel: npm `install` typescript@beta
- Dev channel: npm `install` typescript@next

Compiling TypeScript code

The tsc compilation command comes with typescript, which can be used to compile code.

```
tsc my-code.ts
```

This creates a `my-code.js` file.

Compile using tsconfig.json

You can also provide compilation options that travel with your code via a [tsconfig.json](#) file. To start a new TypeScript project, cd into your project's root directory in a terminal window and run `tsc --init`. This command will generate a `tsconfig.json` file with minimal configuration options, similar to below.

```
{
  "compilerOptions": {
    "module": "commonjs",
    "target": "es5",
    "noImplicitAny": false,
    "sourceMap": false,
    "pretty": true
  },
  "exclude": [
    "node_modules"
  ]
}
```

```
 ]  
 }
```

With a `tsconfig.json` file placed at the root of your TypeScript project, you can use the `tsc` command to run the compilation.

Section 1.2: Basic syntax

TypeScript is a typed superset of JavaScript, which means that all JavaScript code is valid TypeScript code. TypeScript adds a lot of new features on top of that.

TypeScript makes JavaScript more like a strongly-typed, object-oriented language akin to C# and Java. This means that TypeScript code tends to be easier to use for large projects and that code tends to be easier to understand and maintain. The strong typing also means that the language can (and is) precompiled and that variables cannot be assigned values that are out of their declared range. For instance, when a TypeScript variable is declared as a number, you cannot assign a text value to it.

This strong typing and object orientation makes TypeScript easier to debug and maintain, and those were two of the weakest points of standard JavaScript.

Type declarations

You can add type declarations to variables, function parameters and function return types. The type is written after a colon following the variable name, like this: `var num: number = 5;` The compiler will then check the types (where possible) during compilation and report type errors.

```
var num: number = 5;  
num = "this is a string"; // error: Type 'string' is not assignable to type 'number'.
```

The basic types are :

- `number` (both integers and floating point numbers)
- `string`
- `boolean`
- `Array`. You can specify the types of an array's elements. There are two equivalent ways to define array types: `Array<T>` and `T[]`. For example:
 - `number[]` - array of numbers
 - `Array<string>` - array of strings
- `Tuples`. Tuples have a fixed number of elements with specific types.
 - `[boolean, string]` - tuple where the first element is a boolean and the second is a string.
 - `[number, number, number]` - tuple of three numbers.
- `{}` - object, you can define its properties or indexer
 - `{name: string, age: number}` - object with name and age attributes
 - `{[key: string]: number}` - a dictionary of numbers indexed by string
- `enum` - `{ Red = 0, Blue, Green }` - enumeration mapped to numbers
- `Function`. You specify types for the parameters and return value:
 - `(param: number) => string` - function taking one number parameter returning string
 - `() => number` - function with no parameters returning an number.
 - `(a: string, b?: boolean) => void` - function taking a string and optionally a boolean with no return value.
- `any` - Permits any type. Expressions involving any are not type checked.
- `void` - represents "nothing", can be used as a function return value. Only `null` and `undefined` are part of the `void` type.

- never
 - let foo: never; - As the type of variables under type guards that are never true.
 - **function** error(message: string): never { **throw new** Error(message); } - As the return type of functions that never return.
- **null** - type for the value **null**. **null** is implicitly part of every type, unless strict null checks are enabled.

Casting

You can perform explicit casting through angle brackets, for instance:

```
var derived: MyInterface;
(<ImplementingClass>derived).someSpecificMethod();
```

This example shows a derived class which is treated by the compiler as a `MyInterface`. Without the casting on the second line the compiler would throw an exception as it does not understand `someSpecificMethod()`, but casting through `<ImplementingClass>derived` suggests the compiler what to do.

Another way of casting in Typescript is using the `as` keyword:

```
var derived: MyInterface;
(derived as ImplementingClass).someSpecificMethod();
```

Since Typescript 1.6, the default is using the `as` keyword, because using `<>` is ambiguous in `.jsx` files. This is mentioned in [Typescript official documentation](#).

Classes

Classes can be defined and used in TypeScript code. To learn more about classes, see the [Classes documentation](#) page.

Section 1.3: Hello World

```
class Greeter {
  greeting: string;

  constructor(message: string) {
    this.greeting = message;
  }
  greet(): string {
    return this.greeting;
  }
}

let greeter = new Greeter("Hello, world!");
console.log(greeter.greet());
```

Here we have a class, `Greeter`, that has a `constructor` and a `greet` method. We can construct an instance of the class using the `new` keyword and pass in a string we want the `greet` method to output to the console. The instance of our `Greeter` class is stored in the `greeter` variable which we then use to call the `greet` method.

Section 1.4: Running TypeScript using ts-node

[ts-node](#) is an npm package which allows the user to run typescript files directly, without the need for precompilation using `tsc`. It also provides [REPL](#).

Install ts-node globally using

```
npm install -g ts-node
```

ts-node does not bundle typescript compiler, so you might need to install it.

```
npm install -g typescript
```

Executing script

To execute a script named *main.ts*, run

```
ts-node main.ts
// main.ts console.log("Hello world");
```

Example usage

```
$ ts-node main.ts
Hello world
```

Running REPL

To run REPL run command `ts-node`

Example usage

```
$ ts-node
> const sum = (a, b): number => a + b;
undefined
> sum(2, 2)
4
> .exit
```

To exit REPL use command `.exit` or press `CTRL+C` twice.

Section 1.5: TypeScript REPL in Node.js

For use TypeScript REPL in Node.js you can use [tsun package](#)

Install it globally with

```
npm install -g tsun
```

and run in your terminal or command prompt with `tsun` command

Usage example:

```
$ tsun
TSUN : TypeScript Upgraded Node
type in TypeScript expression to evaluate
type :help for commands in repl
$ function multiply(x, y) {
..return x * y;
...
undefined
$ multiply(3, 4)
```


Chapter 2: Importing external libraries

Section 2.1: Finding definition files

for typescript 2.x:

definitions from [DefinitelyTyped](#) are available via [@types npm](#) package

```
npm i --save lodash
npm i --save-dev @types/lodash
```

but in case if you want use types from other repos then can be used old way:

for typescript 1.x:

[Typings](#) is an npm package that can automatically install type definition files into a local project. I recommend that you read the [quickstart](#).

```
npm install -global typings
```

Now we have access to the typings cli.

1. The first step is to search for the package used by the project

```
typings search lodash
NAME          SOURCE HOMEPAGE           DESCRIPTION VERSIONS
UPDATED
lodash        dt      http://lodash.com/   2
  2016-07-20T00:13:09.000Z
lodash        global               1
  2016-07-01T20:51:07.000Z
lodash        npm     https://www.npmjs.com/package/lodash  1
  2016-07-01T20:51:07.000Z
```

2. Then decide which source you should install from. I use dt which stands for [DefinitelyTyped](#) a GitHub repo where the community can edit typings, it's also normally the most recently updated.
3. Install the typings files

```
typings install dt~lodash --global --save
```

Let's break down the last command. We are installing the DefinitelyTyped version of lodash as a global typings file in our project and saving it as a dependency in the `typings.json`. Now wherever we import lodash, typescript will load the lodash typings file.

4. If we want to install typings that will be used for development environment only, we can supply the `--save-dev` flag:

```
typings install chai --save-dev
```

Section 2.2: Importing a module from npm

If you have a type definition file (d.ts) for the module, you can use an `import` statement.

```
import _ = require('lodash');
```

If you don't have a definition file for the module, TypeScript will throw an error on compilation because it cannot find the module you are trying to import.

In this case, you can import the module with the normal runtime `require` function. This returns it as the `any` type, however.

```
// The _ variable is of type any, so TypeScript will not perform any type checking.  
const _: any = require('lodash');
```

As of TypeScript 2.0, you can also use a *shorthand ambient module declaration* in order to tell TypeScript that a module exists when you don't have a type definition file for the module. TypeScript won't be able to provide any meaningful typechecking in this case though.

```
declare module "lodash";  
  
// you can now import from lodash in any way you wish:  
import { flatten } from "lodash";  
import * as _ from "lodash";
```

As of TypeScript 2.1, the rules have been relaxed even further. Now, as long as a module exists in your `node_modules` directory, TypeScript will allow you to import it, even with no module declaration anywhere. (Note that if using the `--noImplicitAny` compiler option, the below will still generate a warning.)

```
// Will work if `node_modules/someModule/index.js` exists, or if  
// `node_modules/someModule/package.json` has a valid "main" entry point  
import { foo } from "someModule";
```

Section 2.3: Using global external libraries without typings

Although modules are ideal, if the library you are using is referenced by a global variable (like `$` or `_`), because it was loaded by a `script` tag, you can create an ambient declaration in order to refer to it:

```
declare const _: any;
```

Section 2.4: Finding definition files with typescript 2.x

With the 2.x versions of typescript, typings are now available from the [npm @types repository](#). These are automatically resolved by the typescript compiler and are much simpler to use.

To install a type definition you simply install it as a dev dependency in your projects package.json

e.g.

```
npm i -S lodash  
npm i -D @types/lodash
```

after install you simply use the module as before

```
import * as _ from 'lodash'
```

Chapter 3: Classes

TypeScript, like ECMA Script 6, support object-oriented programming using classes. This contrasts with older JavaScript versions, which only supported prototype-based inheritance chain.

The class support in TypeScript is similar to that of languages like Java and C#, in that classes may inherit from other classes, while objects are instantiated as class instances.

Also similar to those languages, TypeScript classes may implement interfaces or make use of generics.

Section 3.1: Abstract Classes

```
abstract class Machine {
    constructor(public manufacturer: string) {
    }

    // An abstract class can define methods of it's own, or...
    summary(): string {
        return `${this.manufacturer} makes this machine.`;
    }

    // Require inheriting classes to implement methods
    abstract moreInfo(): string;
}

class Car extends Machine {
    constructor(manufacturer: string, public position: number, protected speed: number) {
        super(manufacturer);
    }

    move() {
        this.position += this.speed;
    }

    moreInfo() {
        return `This is a car located at ${this.position} and going ${this.speed}mph!`;
    }
}

let myCar = new Car("Konda", 10, 70);
myCar.move(); // position is now 80
console.log(myCar.summary()); // prints "Konda makes this machine."
console.log(myCar.moreInfo()); // prints "This is a car located at 80 and going 70mph!"
```

Abstract classes are base classes from which other classes can extend. They cannot be instantiated themselves (i.e. you **cannot** do `new Machine("Konda")`).

The two key characteristics of an abstract class in Typescript are:

1. They can implement methods of their own.
2. They can define methods that inheriting classes **must** implement.

For this reason, abstract classes can conceptually be considered a **combination of an interface and a class**.

Section 3.2: Simple class

```
class Car {
```

```

public position: number = 0;
private speed: number = 42;

move() {
    this.position += this.speed;
}
}

```

In this example, we declare a simple class `Car`. The class has three members: a private property `speed`, a public property `position` and a public method `move`. Note that each member is public by default. That's why `move()` is public, even if we didn't use the `public` keyword.

```

var car = new Car();           // create an instance of Car
car.move();                  // call a method
console.log(car.position);   // access a public property

```

Section 3.3: Basic Inheritance

```

class Car {
    public position: number = 0;
    protected speed: number = 42;

    move() {
        this.position += this.speed;
    }
}

class SelfDrivingCar extends Car {
    move() {
        // start moving around :-
        super.move();
        super.move();
    }
}

```

This examples shows how to create a very simple subclass of the `Car` class using the `extends` keyword. The `SelfDrivingCar` class overrides the `move()` method and uses the base class implementation using `super`.

Section 3.4: Constructors

In this example we use the constructor to declare a public property `position` and a protected property `speed` in the base class. These properties are called *Parameter properties*. They let us declare a constructor parameter and a member in one place.

One of the best things in TypeScript, is automatic assignment of constructor parameters to the relevant property.

```

class Car {
    public position: number;
    protected speed: number;

    constructor(position: number, speed: number) {
        this.position = position;
        this.speed = speed;
    }

    move() {
        this.position += this.speed;
    }
}

```

```
    }
}
```

All this code can be resumed in one single constructor:

```
class Car {
    constructor(public position: number, protected speed: number) {}

    move() {
        this.position += this.speed;
    }
}
```

And both of them will be transpiled from TypeScript (design time and compile time) to JavaScript with same result, but writing significantly less code:

```
var Car = (function () {
    function Car(position, speed) {
        this.position = position;
        this.speed = speed;
    }
    Car.prototype.move = function () {
        this.position += this.speed;
    };
    return Car;
}());
```

Constructors of derived classes have to call the base class constructor with `super()`.

```
class SelfDrivingCar extends Car {
    constructor(startAutoPilot: boolean) {
        super(0, 42);
        if (startAutoPilot) {
            this.move();
        }
    }
}

let car = new SelfDrivingCar(true);
console.log(car.position); // access the public property position
```

Section 3.5: Accessors

In this example, we modify the "Simple class" example to allow access to the speed property. Typescript accessors allow us to add additional code in getters or setters.

```
class Car {
    public position: number = 0;
    private _speed: number = 42;
    private _MAX_SPEED = 100

    move() {
        this.position += this._speed;
    }

    get speed(): number {
        return this._speed;
    }
}
```

```

    set speed(value: number) {
        this._speed = Math.min(value, this._MAX_SPEED);
    }
}

let car = new Car();
car.speed = 120;
console.log(car.speed); // 100

```

Section 3.6: Transpilation

Given a class SomeClass, let's see how the TypeScript is transpiled into JavaScript.

TypeScript source

```

class SomeClass {

    public static SomeStaticValue: string = "hello";
    public someMemberValue: number = 15;
    private somePrivateValue: boolean = false;

    constructor () {
        SomeClass.SomeStaticValue = SomeClass.getGoodbye();
        this.someMemberValue = this.getFortyTwo();
        this.somePrivateValue = this.getTrue();
    }

    public static getGoodbye(): string {
        return "goodbye!";
    }

    public getFortyTwo(): number {
        return 42;
    }

    private getTrue(): boolean {
        return true;
    }
}

```

JavaScript source

When transpiled using TypeScript v2.2.2, the output is like so:

```

var SomeClass = (function () {
    function SomeClass() {
        this.someMemberValue = 15;
        this.somePrivateValue = false;
        SomeClass.SomeStaticValue = SomeClass.getGoodbye();
        this.someMemberValue = this.getFortyTwo();
        this.somePrivateValue = this.getTrue();
    }
    SomeClass.getGoodbye = function () {
        return "goodbye!";
    };
    SomeClass.prototype.getFortyTwo = function () {
        return 42;
    };
    SomeClass.prototype.getTrue = function () {
        return true;
    };
});

```

```
    return SomeClass;
}());
SomeClass.SomeStaticValue = "hello";
```

Observations

- The modification of the class' prototype is wrapped inside an [IIFE](#).
- Member variables are defined inside the main class **function**.
- Static properties are added directly to the class object, whereas instance properties are added to the prototype.

Section 3.7: Monkey patch a function into an existing class

Sometimes it's useful to be able to extend a class with new functions. For example let's suppose that a string should be converted to a camel case string. So we need to tell TypeScript, that `String` contains a function called `toCamelCase`, which returns a `string`.

```
interface String {
  toCamelCase(): string;
}
```

Now we can patch this function into the `String` implementation.

```
String.prototype.toCamelCase = function() : string {
  return this.replace(/[^a-z ]/ig, '')
    .replace(/(?:^|\w|[A-Z]|\b\w|\s+)/g, (match: any, index: number) => {
      return +match === 0 ? "" : match[index === 0 ? 'toLowerCase' : 'toUpperCase']();
    });
}
```

If this extension of `String` is loaded, it's usable like this:

```
"This is an example".toCamelCase(); // => "thisIsAnExample"
```

Chapter 4: Strict null checks

Section 4.1: Strict null checks in action

By default, all types in TypeScript allow `null`:

```
function getId(x: Element) {
  return x.id;
}
getId(null); // TypeScript does not complain, but this is a runtime error.
```

TypeScript 2.0 adds support for strict null checks. If you set `--strictNullChecks` when running `tsc` (or set this flag in your `tsconfig.json`), then types no longer permit `null`:

```
function getId(x: Element) {
  return x.id;
}
getId(null); // error: Argument of type 'null' is not assignable to parameter of type 'Element'.
```

You must permit `null` values explicitly:

```
function getId(x: Element|null) {
  return x.id; // error TS2531: Object is possibly 'null'.
}
getId(null);
```

With a proper guard, the code type checks and runs correctly:

```
function getId(x: Element|null) {
  if (x) {
    return x.id; // In this branch, x's type is Element
  } else {
    return null; // In this branch, x's type is null.
  }
}
getId(null);
```

Section 4.2: Non-null assertions

The non-null assertion operator, `!`, allows you to assert that an expression isn't `null` or `undefined` when the TypeScript compiler can't infer that automatically:

```
type ListNode = { data: number; next?: ListNode; };

function addNext(node: ListNode) {
  if (node.next === undefined) {
    node.next = {data: 0};
  }
}

function setNextValue(node: ListNode, value: number) {
  addNext(node);

  // Even though we know `node.next` is defined because we just called `addNext`,
  // TypeScript isn't able to infer this in the line of code below:
  // node.next.data = value;
```

```
// So, we can use the non-null assertion operator, !,  
// to assert that node.next isn't undefined and silence the compiler warning  
node.next!.data = value;  
}
```

Chapter 5: Using Typescript with React (JS & native)

Section 5.1: ReactJS component written in TypeScript

You can use ReactJS's components easily in TypeScript. Just rename the 'jsx' file extension to 'tsx':

```
//helloMessage.tsx:  
var HelloMessage = React.createClass({  
  render: function() {  
    return <div>Hello {this.props.name}</div>;  
  }  
});  
  
ReactDOM.render(<HelloMessage name="John" />, mountNode);
```

But in order to make full use of TypeScript's main feature (static type checking) you must do a couple things:

1) convert React.createClass to an ES6 Class:

```
//helloMessage.tsx:  
class HelloMessage extends React.Component {  
  render() {  
    return <div>Hello {this.props.name}</div>;  
  }  
}  
  
ReactDOM.render(<HelloMessage name="John" />, mountNode);
```

For more info on converting to ES6 look [here](#)

2) Add Props and State interfaces:

```
interface Props {  
  name:string;  
  optionalParam?:number;  
}  
  
interface State {  
  //empty in our case  
}  
  
class HelloMessage extends React.Component<Props, State> {  
  render() {  
    return <div>Hello {this.props.name}</div>;  
  }  
}  
// TypeScript will allow you to create without the optional parameter  
ReactDOM.render(<HelloMessage name="Sebastian" />, mountNode);  
// But it does check if you pass in an optional parameter of the wrong type  
ReactDOM.render(<HelloMessage name="Sebastian" optionalParam='foo' />, mountNode);
```

Now TypeScript will display an error if the programmer forgets to pass props. Or if trying to pass in props that are not defined in the interface.

Section 5.2: Typescript & react & webpack

Installing typescript, typings and webpack globally

```
npm install -g typescript typings webpack
```

Installing loaders and linking typescript

```
npm install --save-dev ts-loader source-map-loader npm link typescript
```

Linking TypeScript allows ts-loader to use your global installation of TypeScript instead of needing a separate local copy [typescript doc](#)

installing .**d.ts** files with typescript 2.x

```
npm i @types/react --save-dev  
npm i @types/react-dom --save-dev
```

installing .**.ts** files with typescript 1.x

```
typings install --global --save dt~react  
typings install --global --save dt~react-dom
```

tsconfig.json configuration file

```
{  
  "compilerOptions": {  
    "sourceMap": true,  
    "noImplicitAny": true,  
    "module": "commonjs",  
    "target": "es5",  
    "jsx": "react"  
  }  
}
```

webpack.config.js configuration file

```
module.exports = {  
  entry: "<path to entry point>", // for example ./src/helloMessage.tsx  
  output: {  
    filename: "<path to bundle file>", // for example ./dist/bundle.js  
  },  
  
  // Enable sourcemaps for debugging webpack's output.  
  devtool: "source-map",  
  
  resolve: {  
    // Add '.ts' and '.tsx' as resolvable extensions.  
    extensions: [ "", ".webpack.js", ".web.js", ".ts", ".tsx", ".js" ]  
  },  
  
  module: {  
    loaders: [  
      // All files with a '.ts' or '.tsx' extension will be handled by 'ts-loader'.  
      {test: /\.tsx?$/, loader: "ts-loader"}  
    ],
```

```
preLoaders: [
    // All output '.js' files will have any sourcemaps re-processed by 'source-map-loader'.
    {test: /\.js$/, loader: "source-map-loader"}
],
},
// When importing a module whose path matches one of the following, just
// assume a corresponding global variable exists and use that instead.
// This is important because it allows us to avoid bundling all of our
// dependencies, which allows browsers to cache those libraries between builds.
externals: {
    "react": "React",
    "react-dom": "ReactDOM"
},
};
```

finally run webpack or webpack -w (for watch mode)

Note: React and ReactDOM are marked as external

Chapter 6: Functions

Section 6.1: Optional and Default Parameters

Optional Parameters

In TypeScript, every parameter is assumed to be required by the function. You can add a `?` at the end of a parameter name to set it as optional.

For example, the `lastName` parameter of this function is optional:

```
function buildName(firstName: string, lastName?: string) {  
    // ...  
}
```

Optional parameters must come after all non-optional parameters:

```
function buildName(firstName?: string, lastName: string) // Invalid
```

Default Parameters

If the user passes `undefined` or doesn't specify an argument, the default value will be assigned. These are called *default-initialized* parameters.

For example, "Smith" is the default value for the `lastName` parameter.

```
function buildName(firstName: string, lastName = "Smith") {  
    // ...  
}  
buildName('foo', 'bar');      // firstName == 'foo', lastName == 'bar'  
buildName('foo');            // firstName == 'foo', lastName == 'Smith'  
buildName('foo', undefined); // firstName == 'foo', lastName == 'Smith'
```

Section 6.2: Function as a parameter

Suppose we want to receive a function as a parameter, we can do it like this:

```
function foo(otherFunc: Function): void {  
    ...  
}
```

If we want to receive a constructor as a parameter:

```
function foo(constructorFunc: { new(): {} }) {  
    new constructorFunc();  
}  
  
function foo(ctorWithParamsFunc: { new(num: number): {} }) {  
    new ctorWithParamsFunc(1);  
}
```

Or to make it easier to read we can define an interface describing the constructor:

```
interface IConstructor {  
    new();
```

```

}

function foo(contructorFunc: IConstructor) {
    new contructorFunc();
}

```

Or with parameters:

```

interface INumberConstructor {
    new(num: number);
}

function foo(contructorFunc: INumberConstructor) {
    new contructorFunc(1);
}

```

Even with generics:

```

interface ITConstructor<T, U> {
    new(item: T): U;
}

function foo<T, U>(contructorFunc: ITConstructor<T, U>, item: T): U {
    return new contructorFunc(item);
}

```

If we want to receive a simple function and not a constructor it's almost the same:

```

function foo(func: { (): void }) {
    func();
}

function foo(contructorWithParamsFunc: { (num: number): void }) {
    new contructorWithParamsFunc(1);
}

```

Or to make it easier to read we can define an interface describing the function:

```

interface IFunction {
    (): void;
}

function foo(func: IFunction ) {
    func();
}

```

Or with parameters:

```

interface INumberFunction {
    (num: number): string;
}

function foo(func: INumberFunction ) {
    func(1);
}

```

Even with generics:

```

interface ITFunc<T, U> {
    (item: T): U;
}

function foo<T, U>(constructorFunc: ITFunc<T, U>, item: T): U {
    return func(item);
}

```

Section 6.3: Functions with Union Types

A TypeScript function can take in parameters of multiple, predefined types using union types.

```

function whatTime(hour:number|string, minute:number|string):string{
    return hour+':'+minute;
}

whatTime(1,30)           // '1:30'
whatTime('1',30)         // '1:30'
whatTime(1,'30')         // '1:30'
whatTime('1','30')       // '1:30'

```

TypeScript treats these parameters as a single type that is a union of the other types, so your function must be able to handle parameters of any type that is in the union.

```

function addTen(start:number|string):number{
    if(typeof number === 'string'){
        return parseInt(number)+10;
    }else{
        else return number+10;
    }
}

```

Section 6.4: Types of Functions

Named functions

```

function multiply(a, b) {
    return a * b;
}

```

Anonymous functions

```
let multiply = function(a, b) { return a * b; };
```

Lambda / arrow functions

```
let multiply = (a, b) => { return a * b; };
```

Chapter 7: Interfaces

An interface specifies a list of fields and functions that may be expected on any class implementing the interface. Conversely, a class cannot implement an interface unless it has every field and function specified on the interface.

The primary benefit of using interfaces, is that it allows one to use objects of different types in a polymorphic way. This is because any class implementing the interface has at least those fields and functions.

Section 7.1: Extending Interface

Suppose we have an interface:

```
interface IPerson {
    name: string;
    age: number;

    breath(): void;
}
```

And we want to create more specific interface that has the same properties of the person, we can do it using the `extends` keyword:

```
interface IManager extends IPerson {
    managerId: number;

    managePeople(people: IPerson[]): void;
}
```

In addition it is possible to extend multiple interfaces.

Section 7.2: Class Interface

Declare public variables and methods type in the interface to define how other typescript code can interact with it.

```
interface ISampleClassInterface {
    sampleVariable: string;

    sampleMethod(): void;

    optionalVariable?: string;
}
```

Here we create a class that implements the interface.

```
class SampleClass implements ISampleClassInterface {
    public sampleVariable: string;
    private answerToLifeTheUniverseAndEverything: number;

    constructor() {
        this.sampleVariable = 'string value';
        this.answerToLifeTheUniverseAndEverything = 42;
    }

    public sampleMethod(): void {
        // do nothing
    }
}
```

```

private answer(q: any): number {
  return this.answerToLifeTheUniverseAndEverything;
}
}

```

The example shows how to create an interface `ISampleClassInterface` and a class `SampleClass` that **implements** the interface.

Section 7.3: Using Interfaces for Polymorphism

The primary reason to use interfaces to achieve polymorphism and provide developers to implement on their own way in future by implementing interface's methods.

Suppose we have an interface and three classes:

```

interface Connector{
  doConnect(): boolean;
}

```

This is connector interface. Now we will implement that for Wifi communication.

```

export class WifiConnector implements Connector{

  public doConnect(): boolean{
    console.log("Connecting via wifi");
    console.log("Get password");
    console.log("Lease an IP for 24 hours");
    console.log("Connected");
    return true
  }
}

```

Here we have developed our concrete class named `WifiConnector` that has its own implementation. This is now type `Connector`.

Now we are creating our `System` that has a component `Connector`. This is called dependency injection.

```

export class System {
  constructor(private connector: Connector){ #inject Connector type
    connector.doConnect()
  }
}

```

`constructor(private connector: Connector)` this line is very important here. `Connector` is an interface and must have `doConnect()`. As `Connector` is an interface this class `System` has much more flexibility. We can pass any Type which has implemented `Connector` interface. In future developer achieves more flexibility. For example, now developer want to add Bluetooth Connection module:

```

export class BluetoothConnector implements Connector{

  public doConnect(): boolean{
    console.log("Connecting via Bluetooth");
    console.log("Pair with PIN");
    console.log("Connected");
    return true
  }
}

```

```
}
```

See that Wifi and Bluetooth have its own implementation. There own different way to connect. However, hence both have implemented Type Connector the are now Type Connector. So that we can pass any of those to System class as the constructor parameter. This is called polymorphism. The class System is now not aware of whether it is Bluetooth / Wifi even we can add another Communication module like Inferade, Bluetooth5 and whatsoever by just implementing Connector interface.

This is called [Duck typing](#). Connector type is now dynamic as `doConnect()` is just a placeholder and developer implement this as his/her own.

if at `constructor(private connector: WifiConnector)` where `WifiConnector` is a concrete class what will happen? Then `System` class will tightly couple only with `WifiConnector` nothing else. Here interface solved our problem by polymorphism.

Section 7.4: Generic Interfaces

Like classes, interfaces can receive polymorphic parameters (aka Generics) too.

Declaring Generic Parameters on Interfaces

```
interface IStatus<U> {
  code: U;
}

interface IEvents<T> {
  list: T[];
  emit(event: T): void;
  getAll(): T[];
}
```

Here, you can see that our two interfaces take some generic parameters, `T` and `U`.

Implementing Generic Interfaces

We will create a simple class in order to implements the interface `IEvents`.

```
class State<T> implements IEvents<T> {

  list: T[];

  constructor() {
    this.list = [];
  }

  emit(event: T): void {
    this.list.push(event);
  }

  getAll(): T[] {
    return this.list;
  }
}
```

Let's create some instances of our `State` class.

In our example, the `State` class will handle a generic status by using `IStatus<T>`. In this way, the interface

IEvent<T> will also handle a IStatus<T>.

```
const s = new State<IStatus<number>>();

// The 'code' property is expected to be a number, so:
s.emit({ code: 200 }); // works
s.emit({ code: '500' }); // type error

s.getAll().forEach(event => console.log(event.code));
```

Here our State class is typed as IStatus<number>.

```
const s2 = new State<IStatus<Code>>();

//We are able to emit code as the type Code
s2.emit({ code: { message: 'OK', status: 200 } });

s2.getAll().map(event => event.code).forEach(event => {
  console.log(event.message);
  console.log(event.status);
});
```

Our State class is typed as IStatus<Code>. In this way, we are able to pass more complex type to our emit method.

As you can see, generic interfaces can be a very useful tool for statically typed code.

Section 7.5: Add functions or properties to an existing interface

Let's suppose we have a reference to the JQuery type definition and we want to extend it to have additional functions from a plugin we included and which doesn't have an official type definition. We can easily extend it by declaring functions added by plugin in a separate interface declaration with the same JQuery name:

```
interface JQuery {
  pluginFunctionThatDoesNothing(): void;

  // create chainable function
  manipulateDOM(HTMLElement): JQuery;
}
```

The compiler will merge all declarations with the same name into one - see [declaration merging](#) for more details.

Section 7.6: Implicit Implementation And Object Shape

TypeScript supports interfaces, but the compiler outputs JavaScript, which doesn't. Therefore, interfaces are effectively lost in the compile step. This is why type checking on interfaces relies on the *shape* of the object - meaning whether the object supports the fields and functions on the interface - and not on whether the interface is actually implemented or not.

```
interface IKickable {
  kick(distance: number): void;
}

class Ball {
  kick(distance: number): void {
    console.log("Kicked", distance, "meters!");
  }
}
```

```
let kickable: IKickable = new Ball();
kickable.kick(40);
```

So even if Ball doesn't explicitly implement IKickable, a Ball instance may be assigned to (and manipulated as) an IKickable, even when the type is specified.

Section 7.7: Using Interfaces to Enforce Types

One of the core benefits of Typescript is that it enforces data types of values that you are passing around your code to help prevent mistakes.

Let's say you're making a pet dating application.

You have this simple function that checks if two pets are compatible with each other...

```
checkCompatible(petOne, petTwo) {
  if (petOne.species === petTwo.species &&
    Math.abs(petOne.age - petTwo.age) <= 5) {
    return true;
  }
}
```

This is completely functional code, but it would be far too easy for someone, especially other people working on this application who didn't write this function, to be unaware that they are supposed to pass it objects with 'species' and 'age' properties. They may mistakenly try `checkCompatible(petOne.species, petTwo.species)` and then be left to figure out the errors thrown when the function tries to access `petOne.species.species` or `petOne.species.age!`

One way we can prevent this from happening is to specify the properties we want on the pet parameters:

```
checkCompatible(petOne: {species: string, age: number}, petTwo: {species: string, age: number}) {
  //...
}
```

In this case, Typescript will make sure everything passed to the function has 'species' and 'age' properties (it is okay if they have additional properties), but this is a bit of an unwieldy solution, even with only two properties specified. With interfaces, there is a better way!

First we define our interface:

```
interface Pet {
  species: string;
  age: number;
  //We can add more properties if we choose.
}
```

Now all we have to do is specify the type of our parameters as our new interface, like so...

```
checkCompatible(petOne: Pet, petTwo: Pet) {
  //...
}
```

... and Typescript will make sure that the parameters passed to our function contain the properties specified in the Pet interface!

Chapter 8: Using TypeScript with webpack

Section 8.1: webpack.config.js

```
install loaders npm install --save-dev ts-loader source-map-loader
```

tsconfig.json

```
{
  "compilerOptions": {
    "sourceMap": true,
    "noImplicitAny": true,
    "module": "commonjs",
    "target": "es5",
    "jsx": "react" // if you want to use react jsx
  }
}

module.exports = {
  entry: "./src/index.ts",
  output: {
    filename: "./dist/bundle.js",
  },
  // Enable sourcemaps for debugging webpack's output.
  devtool: "source-map",

  resolve: {
    // Add '.ts' and '.tsx' as resolvable extensions.
    extensions: [ "", ".webpack.js", ".web.js", ".ts", ".tsx", ".js" ]
  },
  module: {
    loaders: [
      // All files with a '.ts' or '.tsx' extension will be handled by 'ts-loader'.
      {test: /\.tsx?$/, loader: "ts-loader"}
    ],
    preLoaders: [
      // All output '.js' files will have any sourcemaps re-processed by 'source-map-loader'.
      {test: /\.js$/, loader: "source-map-loader"}
    ]
  },
  // *****
  * If you want to use react *
  *****

  // When importing a module whose path matches one of the following, just
  // assume a corresponding global variable exists and use that instead.
  // This is important because it allows us to avoid bundling all of our
  // dependencies, which allows browsers to cache those libraries between builds.
  // externals: {
  //   "react": "React",
  //   "react-dom": "ReactDOM"
  // },
};

}
```

Chapter 9: Generics

Section 9.1: Generic Interfaces

Declaring a generic interface

```
interface IResult<T> {
    wasSuccessfull: boolean;
    error: T;
}

var result: IResult<string> = ....
var error: string = result.error;
```

Generic interface with multiple type parameters

```
interface IRunnable<T, U> {
    run(input: T): U;
}

var runnable: IRunnable<string, number> = ...
var input: string;
var result: number = runnable.run(input);
```

Implementing a generic interface

```
interface IResult<T>{
    wasSuccessfull: boolean;
    error: T;

    clone(): IResult<T>;
}
```

Implement it with generic class:

```
class Result<T> implements IResult<T> {
    constructor(public result: boolean, public error: T) {}

    public clone(): IResult<T> {
        return new Result<T>(this.result, this.error);
    }
}
```

Implement it with non generic class:

```
class StringResult implements IResult<string> {
    constructor(public result: boolean, public error: string) {}

    public clone(): IResult<string> {
        return new StringResult(this.result, this.error);
    }
}
```

Section 9.2: Generic Class

```
class Result<T> {
    constructor(public wasSuccessful: boolean, public error: T) {
```

```

public clone(): Result<T> {
    ...
}

let r1 = new Result(false, 'error: 42'); // Compiler infers T to string
let r2 = new Result(false, 42); // Compiler infers T to number
let r3 = new Result<string>(true, null); // Explicitly set T to string
let r4 = new Result<string>(true, 4); // Compilation error because 4 is not a string

```

Section 9.3: Type parameters as constraints

With TypeScript 1.8 it becomes possible for a type parameter constraint to reference type parameters from the same type parameter list. Previously this was an error.

```

function assign<T extends U, U>(target: T, source: U): T {
    for (let id in source) {
        target[id] = source[id];
    }
    return target;
}

let x = { a: 1, b: 2, c: 3, d: 4 };
assign(x, { b: 10, d: 20 });
assign(x, { e: 0 }); // Error

```

Section 9.4: Generics Constraints

Simple constraint:

```

interface IRunnable {
    run(): void;
}

interface IRunner<T extends IRunnable> {
    runSafe(runnable: T): void;
}

```

More complex constraint:

```

interface IRunnable<U> {
    run(): U;
}

interface IRunner<T extends IRunnable<U>, U> {
    runSafe(runnable: T): U;
}

```

Even more complex:

```

interface IRunnable<V> {
    run(parameter: U): V;
}

interface IRunner<T extends IRunnable<U, V>, U, V> {
    runSafe(runnable: T, parameter: U): V;
}

```

Inline type constraints:

```
interface IRunnable<T extends { run(): void }> {
    runSafe(runnable: T): void;
}
```

Section 9.5: Generic Functions

In interfaces:

```
interface IRunner {
    runSafe<T extends IRunnable>(runnable: T): void;
}
```

In classes:

```
class Runner implements IRunner {

    public runSafe<T extends IRunnable>(runnable: T): void {
        try {
            runnable.run();
        } catch(e) {
        }
    }
}
```

Simple functions:

```
function runSafe<T extends IRunnable>(runnable: T): void {
    try {
        runnable.run();
    } catch(e) {
    }
}
```

Section 9.6: Using generic Classes and Functions:

Create generic class instance:

```
var stringRunnable = new Runnable<string>();
```

Run generic function:

```
function runSafe<T extends Runnable<U>, U>(runnable: T);

// Specify the generic types:
runSafe<Runnable<string>, string>(stringRunnable);

// Let typescript figure the generic types by himself:
runSafe(stringRunnable);
```

Chapter 10: TypeScript Core Types

Section 10.1: String Literal Types

String literal types allow you to specify the exact value a string can have.

```
let myFavoritePet: "dog";
myFavoritePet = "dog";
```

Any other string will give an error.

```
// Error: Type '"rock"' is not assignable to type '"dog"'.
// myFavoritePet = "rock";
```

Together with Type Aliases and Union Types you get an enum-like behavior.

```
type Species = "cat" | "dog" | "bird";

function buyPet(pet: Species, name: string) : Pet { /*...*/ }

buyPet(myFavoritePet /* "dog" as defined above */, "Rocky");

// Error: Argument of type '"rock'" is not assignable to parameter of type "'cat' | 'dog' | 'bird'.
// Type '"rock"' is not assignable to type '"bird"'.
// buyPet("rock", "Rocky");
```

String Literal Types can be used to distinguish overloads.

```
function buyPet(pet: Species, name: string) : Pet;
function buyPet(pet: "cat", name: string): Cat;
function buyPet(pet: "dog", name: string): Dog;
function buyPet(pet: "bird", name: string): Bird;
function buyPet(pet: Species, name: string) : Pet { /*...*/ }

let dog = buyPet(myFavoritePet /* "dog" as defined above */, "Rocky");
// dog is from type Dog (dog: Dog)
```

They work well for User-Defined Type Guards.

```
interface Pet {
    species: Species;
    eat();
    sleep();
}

interface Cat extends Pet {
    species: "cat";
}

interface Bird extends Pet {
    species: "bird";
    sing();
}

function petIsCat(pet: Pet): pet is Cat {
    return pet.species === "cat";
}
```

```

function petIsBird(pet: Pet): pet is Bird {
    return pet.species === "bird";
}

function playWithPet(pet: Pet){
    if(petIsCat(pet)) {
        // pet is now from type Cat (pet: Cat)
        pet.eat();
        pet.sleep();
    } else if(petIsBird(pet)) {
        // pet is now from type Bird (pet: Bird)
        pet.eat();
        pet.sing();
        pet.sleep();
    }
}

```

Full example code

```

let myFavoritePet: "dog";
myFavoritePet = "dog";

// Error: Type '"rock"' is not assignable to type '"dog"'.
// myFavoritePet = "rock";

type Species = "cat" | "dog" | "bird";

interface Pet {
    species: Species;
    name: string;
    eat();
    walk();
    sleep();
}

interface Cat extends Pet {
    species: "cat";
}

interface Dog extends Pet {
    species: "dog";
}

interface Bird extends Pet {
    species: "bird";
    sing();
}

// Error: Interface 'Rock' incorrectly extends interface 'Pet'. Types of property 'species' are
// incompatible. Type '"rock"' is not assignable to type '"cat" | "dog" | "bird"'. Type '"rock"' is not
// assignable to type '"bird"'.
// interface Rock extends Pet {
//     type: "rock";
// }

function buyPet(pet: Species, name: string) : Pet;
function buyPet(pet: "cat", name: string): Cat;
function buyPet(pet: "dog", name: string): Dog;
function buyPet(pet: "bird", name: string): Bird;
function buyPet(pet: Species, name: string) : Pet {
    if(pet === "cat") {

```

```

        return {
            species: "cat",
            name: name,
            eat: function () {
                console.log(` ${this.name} eats.`);
            },
            walk: function () {
                console.log(` ${this.name} walks.`);
            },
            sleep: function () {
                console.log(` ${this.name} sleeps.`);
            }
        } as Cat;
    } else if(pet === "dog") {
        return {
            species: "dog",
            name: name,
            eat: function () {
                console.log(` ${this.name} eats.`);
            },
            walk: function () {
                console.log(` ${this.name} walks.`);
            },
            sleep: function () {
                console.log(` ${this.name} sleeps.`);
            }
        } as Dog;
    } else if(pet === "bird") {
        return {
            species: "bird",
            name: name,
            eat: function () {
                console.log(` ${this.name} eats.`);
            },
            walk: function () {
                console.log(` ${this.name} walks.`);
            },
            sleep: function () {
                console.log(` ${this.name} sleeps.`);
            },
            sing: function () {
                console.log(` ${this.name} sings.`);
            }
        } as Bird;
    } else {
        throw `Sorry we don't have a ${pet}. Would you like to buy a dog?`;
    }
}

function petIsCat(pet: Pet): pet is Cat {
    return pet.species === "cat";
}

function petIsDog(pet: Pet): pet is Dog {
    return pet.species === "dog";
}

function petIsBird(pet: Pet): pet is Bird {
    return pet.species === "bird";
}

function playWithPet(pet: Pet) {
    console.log(`Hey ${pet.name}, let's play.`);

    if(petIsCat(pet)) {
        // pet is now from type Cat (pet: Cat)

        pet.eat();
        pet.sleep();
    }
}

```

```

// Error: Type '"bird"' is not assignable to type '"cat"'.
// pet.type = "bird";

// Error: Property 'sing' does not exist on type 'Cat'.
// pet.sing();

} else if(petIsDog(pet)) {
    // pet is now from type Dog (pet: Dog)

    pet.eat();
    pet.walk();
    pet.sleep();

} else if(petIsBird(pet)) {
    // pet is now from type Bird (pet: Bird)

    pet.eat();
    pet.sing();
    pet.sleep();
} else {
    throw "An unknown pet. Did you buy a rock?";
}
}

let dog = buyPet(myFavoritePet /* "dog" as defined above */, "Rocky");
// dog is from type Dog (dog: Dog)

// Error: Argument of type '"rock"' is not assignable to parameter of type "'cat' | "dog" | "bird"'.
// Type '"rock"' is not assignable to type '"bird"'.
// buyPet("rock", "Rocky");

playWithPet(dog);
// Output: Hey Rocky, let's play.
//          Rocky eats.
//          Rocky walks.
//          Rocky sleeps.

```

Section 10.2: Tuple

Array type with known and possibly different types:

```

let day: [number, string];
day = [0, 'Monday'];      // valid
day = ['zero', 'Monday']; // invalid: 'zero' is not numeric
console.log(day[0]); // 0
console.log(day[1]); // Monday

day[2] = 'Saturday'; // valid: [0, 'Saturday']
day[3] = false;      // invalid: must be union type of 'number | string'

```

Section 10.3: Boolean

A boolean represents the most basic datatype in TypeScript, with the purpose of assigning true/false values.

```

// set with initial value (either true or false)
let isTrue: boolean = true;

// defaults to 'undefined', when not explicitly set
let unsetBool: boolean;

```

```
// can also be set to 'null' as well
let nullableBool: boolean = null;
```

Section 10.4: Intersection Types

A Intersection Type combines the member of two or more types.

```
interface Knife {
  cut();
}

interface BottleOpener{
  openBottle();
}

interface Screwdriver{
  turnScrew();
}

type SwissArmyKnife = Knife & BottleOpener & Screwdriver;

function use(tool: SwissArmyKnife){
  console.log("I can do anything!");

  tool.cut();
  tool.openBottle();
  tool.turnScrew();
}
```

Section 10.5: Types in function arguments and return value. Number

When you create a function in TypeScript you can specify the data type of the function's arguments and the data type for the return value

Example:

```
function sum(x: number, y: number): number {
  return x + y;
}
```

Here the syntax `x: number, y: number` means that the function can accept two arguments `x` and `y` and they can only be numbers and `(...): number` means that the return value can only be a number

Usage:

```
sum(84 + 76) // will be return 160
```

Note:

You can not do so

```
function sum(x: string, y: string): number {
  return x + y;
}
```

or

```
function sum(x: number, y: number): string {
    return x + y;
}
```

it will receive the following errors:

```
error TS2322: Type 'string' is not assignable to type 'number' and error TS2322: Type 'number' is not assignable to type 'string' respectively
```

Section 10.6: Types in function arguments and return value. String

Example:

```
function hello(name: string): string {
    return `Hello ${name}!`;
}
```

Here the syntax `name: string` means that the function can accept one name argument and this argument can only be string and `(...): string {` means that the return value can only be a string

Usage:

```
hello('StackOverflow Documentation') // will be return Hello StackOverflow Documentation!
```

Section 10.7: const Enum

A const Enum is the same as a normal Enum. Except that no Object is generated at compile time. Instead, the literal values are substituted where the const Enum is used.

```
// Typescript: A const Enum can be defined like a normal Enum (with start value, specifying values, etc.)
const enum NinjaActivity {
    Espionage,
    Sabotage,
    Assassination
}

// Javascript: But nothing is generated

// Typescript: Except if you use it
let myFavoriteNinjaActivity = NinjaActivity.Espionage;
console.log(myFavoritePirateActivity); // 0

// Javascript: Then only the number of the value is compiled into the code
// var myFavoriteNinjaActivity = 0 /* Espionage */;
// console.log(myFavoritePirateActivity); // 0

// Typescript: The same for the other constant example
console.log(NinjaActivity["Sabotage"]); // 1

// Javascript: Just the number and in a comment the name of the value
// console.log(1 /* "Sabotage" */); // 1

// Typescript: But without the object none runtime access is possible
// Error: A const enum member can only be accessed using a string literal.
// console.log(NinjaActivity[myFavoriteNinjaActivity]);
```

For comparison, a normal Enum

```
// Typescript: A normal Enum
enum PirateActivity {
    Boarding,
    Drinking,
    Fencing
}

// Javascript: The Enum after the compiling
// var PirateActivity;
// (function (PirateActivity) {
//     PirateActivity[PirateActivity["Boarding"] = 0] = "Boarding";
//     PirateActivity[PirateActivity["Drinking"] = 1] = "Drinking";
//     PirateActivity[PirateActivity["Fencing"] = 2] = "Fencing";
// })(PirateActivity || (PirateActivity = {}));

// Typescript: A normale use of this Enum
let myFavoritePirateActivity = PirateActivity.Booking;
console.log(myFavoritePirateActivity); // 0

// Javascript: Looks quite similar in Javascript
// var myFavoritePirateActivity = PirateActivity.Booking;
// console.log(myFavoritePirateActivity); // 0

// Typescript: And some other normale use
console.log(PirateActivity["Drinking"]); // 1

// Javascript: Looks quite similar in Javascript
// console.log(PirateActivity["Drinking"]); // 1

// Typescript: At runtime, you can access an normal enum
console.log(PirateActivity[myFavoritePirateActivity]); // "Boarding"

// Javascript: And it will be resolved at runtime
// console.log(PirateActivity[myFavoritePirateActivity]); // "Boarding"
```

Section 10.8: Number

Like JavaScript, numbers are floating point values.

```
let pi: number = 3.14;           // base 10 decimal by default
let hexadecimal: number = 0xFF; // 255 in decimal
```

ECMAScript 2015 allows binary and octal.

```
let binary: number = 0b10; // 2 in decimal
let octal: number = 0o755; // 493 in decimal
```

Section 10.9: String

Textual data type:

```
let singleQuotes: string = 'single';
let doubleQuotes: string = "double";
let templateString: string = `I am ${ singleQuotes }`; // I am single
```

Section 10.10: Array

An array of values:

```
let threePigs: number[] = [1, 2, 3];
let genericStringArray: Array<string> = ['first', '2nd', '3rd'];
```

Section 10.11: Enum

A type to name a set of numeric values:

Number values default to 0:

```
enum Day { Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday };
let bestDay: Day = Day.Saturday;
```

Set a default starting number:

```
enum TenPlus { Ten = 10, Eleven, Twelve }
```

or assign values:

```
enum MyOddSet { Three = 3, Five = 5, Seven = 7, Nine = 9 }
```

Section 10.12: Any

When unsure of a type, any is available:

```
let anything: any = 'I am a string';
anything = 5; // but now I am the number 5
```

Section 10.13: Void

If you have no type at all, commonly used for functions that do not return anything:

```
function log(): void {
    console.log('I return nothing');
}
```

void types Can only be assigned **null** or **undefined**.

Chapter 11: Integrating with Build Tools

Section 11.1: Browserify

Install

```
npm install tsify
```

Using Command Line Interface

```
browserify main.ts -p [ tsify --noImplicitAny ] > bundle.js
```

Using API

```
var browserify = require("browserify");
var tsify = require("tsify");

browserify()
  .add("main.ts")
  .plugin("tsify", { noImplicitAny: true })
  .bundle()
  .pipe(process.stdout);
```

More details: [smrq/tsify](#)

Section 11.2: Webpack

Install

```
npm install ts-loader --save-dev
```

Basic webpack.config.js

webpack 2.x, 3.x

```
module.exports = {
  resolve: {
    extensions: ['.ts', '.tsx', '.js']
  },
  module: {
    rules: [
      {
        // Set up ts-loader for .ts/.tsx files and exclude any imports from node_modules.
        test: /\.tsx?$/,
        loaders: ['ts-loader'],
        exclude: /node_modules/
      }
    ]
  },
  entry: [
    // Set index.tsx as application entry point.
    './index.tsx'
  ],
  output: {
    filename: "bundle.js"
  }
};
```

webpack 1.x

```
module.exports = {
  entry: "./src/index.tsx",
  output: {
    filename: "bundle.js"
  },
  resolve: {
```

```

    // Add '.ts' and '.tsx' as a resolvable extension.
    extensions: [ "", ".webpack.js", ".web.js", ".ts", ".tsx", ".js" ]
},
module: {
    loaders: [
        // all files with a '.ts' or '.tsx' extension will be handled by 'ts-loader'
        { test: /\.ts(x)?$/, loader: "ts-loader", exclude: /node_modules/ }
    ]
}
}

```

See more details on [ts-loader here](#).

Alternatives:

- [awesome-typescript-loader](#)

Section 11.3: Grunt

Install

```
npm install grunt-ts
```

Basic Gruntfile.js

```

module.exports = function(grunt) {
    grunt.initConfig({
        ts: {
            default : {
                src: ["**/*.ts", "!node_modules/**/*.ts"]
            }
        }
    });
    grunt.loadNpmTasks("grunt-ts");
    grunt.registerTask("default", ["ts"]);
};

```

More details: [TypeStrong/grunt-ts](#)

Section 11.4: Gulp

Install

```
npm install gulp-typescript
```

Basic gulpfile.js

```

var gulp = require("gulp");
var ts = require("gulp-typescript");

gulp.task("default", function () {
    var tsResult = gulp.src("src/*.ts")
        .pipe(ts({
            noImplicitAny: true,
            out: "output.js"
        }));
    return tsResult.js.pipe(gulp.dest("built/local"));
});

```

gulpfile.js using an existing tsconfig.json

```

var gulp = require("gulp");
var ts = require("gulp-typescript");

```

```

var tsProject = ts.createProject('tsconfig.json', {
  noImplicitAny: true // You can add and overwrite parameters here
});

gulp.task("default", function () {
  var tsResult = tsProject.src()
    .pipe(tsProject());
  return tsResult.js.pipe(gulp.dest('release'));
});

```

More details: [ivogabe/gulp-typescript](#)

Section 11.5: MSBuild

Update project file to include locally installed `Microsoft.TypeScript.Default.props` (at the top) and `Microsoft.TypeScript.targets` (at the bottom) files:

```

<?xml version="1.0" encoding="utf-8"?>
<Project ToolsVersion="4.0" DefaultTargets="Build"
xmlns="http://schemas.microsoft.com/developer/msbuild/2003">
  <!-- Include default props at the bottom -->
  <Import
    Project="$(MSBuildExtensionsPath32)\Microsoft\VisualStudio\v$(VisualStudioVersion)\TypeScript\Microsoft.TypeScript.Default.props"
    Condition="Exists('$(MSBuildExtensionsPath32)\Microsoft\VisualStudio\v$(VisualStudioVersion)\TypeScript\Microsoft.TypeScript.Default.props')"/>

  <!-- TypeScript configurations go here -->
  <PropertyGroup Condition="'$(Configuration)' == 'Debug'>
    <TypeScriptRemoveComments>false</TypeScriptRemoveComments>
    <TypeScriptSourceMap>true</TypeScriptSourceMap>
  </PropertyGroup>
  <PropertyGroup Condition="'$(Configuration)' == 'Release'>
    <TypeScriptRemoveComments>true</TypeScriptRemoveComments>
    <TypeScriptSourceMap>false</TypeScriptSourceMap>
  </PropertyGroup>

  <!-- Include default targets at the bottom -->
  <Import
    Project="$(MSBuildExtensionsPath32)\Microsoft\VisualStudio\v$(VisualStudioVersion)\TypeScript\Microsoft.TypeScript.targets"
    Condition="Exists('$(MSBuildExtensionsPath32)\Microsoft\VisualStudio\v$(VisualStudioVersion)\TypeScript\Microsoft.TypeScript.targets')"/>
</Project>

```

More details about defining MSBuild compiler options: [Setting Compiler Options in MSBuild projects](#)

Section 11.6: NuGet

- Right-Click -> Manage NuGet Packages
- Search for `Microsoft.TypeScript.MSBuild`
- Hit Install
- When install is complete, rebuild!

More details can be found at [Package Manager Dialog](#) and [using nightly builds with NuGet](#)

Section 11.7: Install and configure webpack + loaders

Installation

```
npm install -D webpack typescript ts-loader
```

webpack.config.js

```
module.exports = {
  entry: {
    app: ['./src/'],
  },
  output: {
    path: __dirname,
    filename: './dist/[name].js',
  },
  resolve: {
    extensions: ['', '.js', '.ts'],
  },
  module: {
    loaders: [
      { test: /\.ts(x)$/ , loaders: ['ts-loader'] , exclude: /node_modules/ }
    ],
  }
};
```

Chapter 12: Publish TypeScript definition files

Section 12.1: Include definition file with library on npm

Add typings to your package.json

```
{  
...  
"typings": "path/file.d.ts"  
...  
}
```

Now when ever that library is imported typescript will load the typings file

Chapter 13: Class Decorator

Parameter	Details
target	The class being decorated

Section 13.1: Generating metadata using a class decorator

This time we are going to declare a class decorator that will add some metadata to a class when we applied to it:

```
function addMetadata(target: any) {  
  
    // Add some metadata  
    target.__customMetadata = {  
        someKey: "someValue"  
    };  
  
    // Return target  
    return target;  
  
}
```

We can then apply the class decorator:

```
@addMetadata  
class Person {  
    private _name: string;  
    public constructor(name: string) {  
        this._name = name;  
    }  
    public greet() {  
        return this._name;  
    }  
}  
  
function getMetadataFromClass(target: any) {  
    return target.__customMetadata;  
}  
  
console.log(getMetadataFromClass(Person));
```

The decorator is applied when the class is declared not when we create instances of the class. This means that the metadata is shared across all the instances of a class:

```
function getMetadataFromInstance(target: any) {  
    return target.constructor.__customMetadata;  
}  
  
let person1 = new Person("John");  
let person2 = new Person("Lisa");  
  
console.log(getMetadataFromInstance(person1));  
console.log(getMetadataFromInstance(person2));
```

Section 13.2: Passing arguments to a class decorator

We can wrap a class decorator with another function to allow customization:

```

function addMetadata(metadata: any) {
  return function log(target: any) {

    // Add metadata
    target.__customMetadata = metadata;

    // Return target
    return target;
  }
}

```

The `addMetadata` takes some arguments used as configuration and then returns an unnamed function which is the actual decorator. In the decorator we can access the arguments because there is a closure in place.

We can then invoke the decorator passing some configuration values:

```

@addMetadata({ guid: "417c6ec7-ec05-4954-a3c6-73a0d7f9f5bf" })
class Person {
  private _name: string;
  public constructor(name: string) {
    this._name = name;
  }
  public greet() {
    return this._name;
  }
}

```

We can use the following function to access the generated metadata:

```

function getMetadataFromClass(target: any) {
  return target.__customMetadata;
}

console.log(getMetadataFromClass(Person));

```

If everything went right the console should display:

```
{ guid: "417c6ec7-ec05-4954-a3c6-73a0d7f9f5bf" }
```

Section 13.3: Basic class decorator

A class decorator is just a function that takes the class as its only argument and returns it after doing something with it:

```

function log<T>(target: T) {

  // Do something with target
  console.log(target);

  // Return target
  return target;
}

```

We can then apply the class decorator to a class:

```
@log
class Person {
    private _name: string;
    public constructor(name: string) {
        this._name = name;
    }
    public greet() {
        return this._name;
    }
}
```

Chapter 14: tsconfig.json

Section 14.1: Create TypeScript project with tsconfig.json

The presence of a **tsconfig.json** file indicates that the current directory is the root of a TypeScript enabled project.

Initializing a TypeScript project, or better put tsconfig.json file, can be done through the following command:

```
tsc --init
```

As of TypeScript v2.3.0 and higher this will create the following tsconfig.json by default:

```
{
  "compilerOptions": {
    /* Basic Options */
    "target": "es5",                                     /* Specify ECMAScript target version: 'ES3' (default), 'ES5', 'ES2015', 'ES2016', 'ES2017', or 'ESNEXT'. */
    "module": "commonjs",                                /* Specify module code generation: 'commonjs', 'amd', 'system', 'umd' or 'es2015'. */
    "system": false,                                     /* Specify library files to be included in the compilation */
    "lib": [],                                         /* Specify library files to be included in the compilation */
    "allowJs": true,                                    /* Allow javascript files to be compiled. */
    "checkJs": true,                                   /* Report errors in .js files. */
    "jsx": "preserve",                                 /* Specify JSX code generation: 'preserve', 'react-native', or 'react'. */
    "declaration": true,                               /* Generates corresponding '.d.ts' file. */
    "sourceMap": true,                                 /* Generates corresponding '.map' file. */
    "outFile": "./",                                  /* Concatenate and emit output to single file. */
    "outDir": "./",                                  /* Redirect output structure to the directory. */
    "rootDir": "./",                                 /* Specify the root directory of input files. Use to control the output directory structure with --outDir. */
    "removeComments": true,                            /* Do not emit comments to output. */
    "noEmit": true,                                   /* Do not emit outputs. */
    "importHelpers": true,                            /* Import emit helpers from 'tslib'. */
    "downlevelIteration": true,                         /* Provide full support for iterables in 'for-of', spread, and destructuring when targeting 'ES5' or 'ES3'. */
    "isolatedModules": true,                           /* Transpile each file as a separate module (similar to 'ts.transpileModule'). */

    /* Strict Type-Checking Options */
    "strict": true,                                    /* Enable all strict type-checking options. */
    "noImplicitAny": true,                            /* Raise error on expressions and declarations with an implied 'any' type. */
    "strictNullChecks": true,                          /* Enable strict null checks. */
    "noImplicitThis": true,                            /* Raise error on 'this' expressions with an implied 'any' type. */
    "alwaysStrict": true,                             /* Parse in strict mode and emit "use strict" for each source file. */

    /* Additional Checks */
    "noUnusedLocals": true,                           /* Report errors on unused locals. */
    "noUnusedParameters": true,                        /* Report errors on unused parameters. */
    "noImplicitReturns": true,                         /* Report error when not all code paths in function return a value. */
    "noFallthroughCasesInSwitch": true,                /* Report errors for fallthrough cases in switch statement. */

    /* Module Resolution Options */
    "moduleResolution": "node",                      /* Specify module resolution strategy: 'node' (Node.js) */
  }
}
```

```

or 'classic' (TypeScript pre-1.6). */
  // "baseUrl": "./",                               /* Base directory to resolve non-absolute module names.
*/
  // "paths": {},                                     /* A series of entries which re-map imports to lookup
locations relative to the 'baseUrl'. */
  // "rootDirs": [],                                /* List of root folders whose combined content
represents the structure of the project at runtime. */
  // "typeRoots": [],                                /* List of folders to include type definitions from. */
  // "types": [],                                    /* Type declaration files to be included in
compilation. */
  // "allowSyntheticDefaultImports": true, /* Allow default imports from modules with no default
export. This does not affect code emit, just typechecking. */

  /* Source Map Options */
  // "sourceRoot": "./",                            /* Specify the location where debugger should locate
TypeScript files instead of source locations. */
  // "mapRoot": "./",                             /* Specify the location where debugger should locate
map files instead of generated locations. */
  // "inlineSourceMap": true,                      /* Emit a single file with source maps instead of
having a separate file. */
  // "inlineSources": true,                        /* Emit the source alongside the sourcemap within a
single file; requires '--inlineSourceMap' or '--sourceMap' to be set. */

  /* Experimental Options */
  // "experimentalDecorators": true,                /* Enables experimental support for ES7 decorators. */
  // "emitDecoratorMetadata": true,                  /* Enables experimental support for emitting type
metadata for decorators. */
}
}

```

Most, if not all, options are generated automatically with only the bare necessities left uncommented.

Older versions of TypeScript, like for example v2.0.x and lower, would generate a tsconfig.json like this:

```
{
  "compilerOptions": {
    "module": "commonjs",
    "target": "es5",
    "noImplicitAny": false,
    "sourceMap": false
  }
}
```

Section 14.2: Configuration for fewer programming errors

There are very good configurations to force typings and get more helpful errors which are not activated by default.

```
{
  "compilerOptions": {

    "alwaysStrict": true, // Parse in strict mode and emit "use strict" for each source file.

    // If you have wrong casing in referenced files e.g. the filename is Global.ts and you have a /**
    <reference path="global.ts" /> to reference this file, then this can cause to unexpected errors.
    Visite: http://stackoverflow.com/questions/36628612/typescript-transpiler-casing-issue
    "forceConsistentCasingInFileNames": true, // Disallow inconsistently-cased references to the
    same file.

    // "allowUnreachableCode": false, // Do not report errors on unreachable code. (Default: False)
    // "allowUnusedLabels": false, // Do not report errors on unused labels. (Default: False)
  }
}
```

```

    "noFallthroughCasesInSwitch": true, // Report errors for fall through cases in switch statement.
    "noImplicitReturns": true, // Report error when not all code paths in function return a value.

    "noUnusedParameters": true, // Report errors on unused parameters.
    "noUnusedLocals": true, // Report errors on unused locals.

    "noImplicitAny": true, // Raise error on expressions and declarations with an implied "any" type.
    "noImplicitThis": true, // Raise error on this expressions with an implied "any" type.

    "strictNullChecks": true, // The null and undefined values are not in the domain of every type
    and are only assignable to themselves and any.

    // To enforce this rules, add this configuration.
    "noEmitOnError": true // Do not emit outputs if any errors were reported.
  }
}

```

Not enough? If you are a hard coder and want more, then you may be interested to check your TypeScript files with tslint before compiling it with tsc. Check how to configure tslint for even stricter code.

Section 14.3: compileOnSave

Setting a top-level property `compileOnSave` signals to the IDE to generate all files for a given **tsconfig.json** upon saving.

```
{
  "compileOnSave": true,
  "compilerOptions": {
    ...
  },
  "exclude": [
    ...
  ]
}
```

This feature is available since TypeScript 1.8.4 and onward, but needs to be directly supported by IDE's. Currently, examples of supported IDE's are:

- Visual Studio 2015 [with Update 3](#)
- [JetBrains WebStorm](#)
- Atom [with atom-typescript](#)

Section 14.4: Comments

A tsconfig.json file can contain both line and block comments, using the same rules as ECMAScript.

```
//Leading comment
{
  "compilerOptions": {
    //this is a line comment
    "module": "commonjs", //eol line comment
    "target" /*inline block*/ : "es5",
    /* This is a
    block
    comment */
  }
}
```

```
/* trailing comment */
```

Section 14.5: preserveConstEnums

TypeScript supports constant enumerables, declared through `const enum`.

This is usually just syntax sugar as the constant enums are inlined in compiled JavaScript.

For instance the following code

```
const enum Tristate {
    True,
    False,
    Unknown
}

var something = Tristate.True;
```

compiles to

```
var something = 0;
```

Although the performance benefit from inlining, you may prefer to keep enums even if constant (ie: you may wish readability on development code), to do this you have to set in `tsconfig.json` the `preserveConstEnums` clause into the `compilerOptions` to `true`.

```
{
    "compilerOptions": {
        "preserveConstEnums" = true,
        ...
    },
    "exclude": [
        ...
    ]
}
```

By this way the previous example would be compiled as any other enums, as shown in following snippet.

```
var Tristate;
(function (Tristate) {
    Tristate[Tristate["True"] = 0] = "True";
    Tristate[Tristate["False"] = 1] = "False";
    Tristate[Tristate["Unknown"] = 2] = "Unknown";
})(Tristate || (Tristate = {}));

var something = Tristate.True
```

Chapter 15: Mixins

Parameter	Description
derivedCtor	The class that you want to use as the composition class
baseCtors	An array of classes to be added to the composition class

Section 15.1: Example of Mixins

To create mixins, simply declare lightweight classes that can be used as "behaviours".

```
class Flies {
  fly() {
    alert('Is it a bird? Is it a plane?');
  }
}

class Climbs {
  climb() {
    alert('My spider-sense is tingling.');
  }
}

class Bulletproof {
  deflect() {
    alert('My wings are a shield of steel.');
  }
}
```

You can then apply these behaviours to a composition class:

```
class BeetleGuy implements Climbs, Bulletproof {
  climb: () => void;
  deflect: () => void;
}
applyMixins (BeetleGuy, [Climbs, Bulletproof]);
```

The `applyMixins` function is needed to do the work of composition.

```
function applyMixins(derivedCtor: any, baseCtors: any[]) {
  baseCtors.forEach(baseCtor => {
    Object.getOwnPropertyNames(baseCtor.prototype).forEach(name => {
      if (name !== 'constructor') {
        derivedCtor.prototype[name] = baseCtor.prototype[name];
      }
    });
  });
}
```

Chapter 16: Enums

Section 16.1: Enums with explicit values

By default all `enum` values are resolved to numbers. Let's say if you have something like

```
enum MimeType {  
    JPEG,  
    PNG,  
    PDF  
}
```

the real value behind e.g. `MimeType.PDF` will be 2.

But some of the time it is important to have the enum resolve to a different type. E.g. you receive the value from backend / frontend / another system which is definitely a string. This could be a pain, but luckily there is this method:

```
enum MimeType {  
    JPEG = <any>'image/jpeg',  
    PNG = <any>'image/png',  
    PDF = <any>'application/pdf'  
}
```

This resolves the `MimeType.PDF` to `application/pdf`.

Since TypeScript 2.4 it's possible to declare [string enums](#):

```
enum MimeType {  
    JPEG = 'image/jpeg',  
    PNG = 'image/png',  
    PDF = 'application/pdf',  
}
```

You can explicitly provide numeric values using the same method

```
enum MyType {  
    Value = 3,  
    ValueEx = 30,  
    ValueEx2 = 300  
}
```

Fancier types also work, since non-const enums are real objects at runtime, for example

```
enum FancyType {  
    OneArr = <any>[1],  
    TwoArr = <any>[2, 2],  
    ThreeArr = <any>[3, 3, 3]  
}
```

becomes

```
var FancyType;  
(function (FancyType) {  
    FancyType[FancyType["OneArr"] = [1]] = "OneArr";  
    FancyType[FancyType["TwoArr"] = [2, 2]] = "TwoArr";  
})()
```

```
FancyType[FancyType["ThreeArr"] = [3, 3, 3]] = "ThreeArr";
})(FancyType || (FancyType = {}));
```

Section 16.2: How to get all enum values

```
enum SomeEnum { A, B }

let enumValues:Array<string>= [];

for(let value in SomeEnum) {
  if(typeof SomeEnum[value] === 'number') {
    enumValues.push(value);
  }
}

enumValues.forEach(v=> console.log(v))
//A
//B
```

Section 16.3: Extending enums without custom enum implementation

```
enum SourceEnum {
  value1 = <any>'value1',
  value2 = <any>'value2'
}

enum AdditionToSourceEnum {
  value3 = <any>'value3',
  value4 = <any>'value4'
}

// we need this type for TypeScript to resolve the types correctly
type TestEnumType = SourceEnum | AdditionToSourceEnum;
// and we need this value "instance" to use values
let TestEnum = Object.assign({}, SourceEnum, AdditionToSourceEnum);
// also works fine the TypeScript 2 feature
// let TestEnum = { ...SourceEnum, ...AdditionToSourceEnum };

function check(test: TestEnumType) {
  return test === TestEnum.value2;
}

console.log(TestEnum.value1);
console.log(TestEnum.value2 === <any>'value2');
console.log(check(TestEnum.value2));
console.log(check(TestEnum.value3));
```

Section 16.4: Custom enum implementation: extends for enums

Sometimes it is required to implement Enum on your own. E.g. there is no clear way to extend other enums. Custom implementation allows this:

```
class Enum {
  constructor(protected value: string) {}

  public toString() {
```

```

    return String(this.value);
}

public is(value: Enum | string) {
    return this.value = value.toString();
}
}

class SourceEnum extends Enum {
    public static value1 = new SourceEnum('value1');
    public static value2 = new SourceEnum('value2');
}

class TestEnum extends SourceEnum {
    public static value3 = new TestEnum('value3');
    public static value4 = new TestEnum('value4');
}

function check(test: TestEnum) {
    return test === TestEnum.value2;
}

let value1 = TestEnum.value1;

console.log(value1 + 'hello');
console.log(value1.toString() === 'value1');
console.log(value1.is('value1'));
console.log(!TestEnum.value3.is(TestEnum.value3));
console.log(check(TestEnum.value2));
// this works but perhaps your TSLint would complain
// attention! does not work with ===
// use .is() instead
console.log(TestEnum.value1 == <any>'value1');

```

Chapter 17: TypeScript with AngularJS

Name	Description
controllerAs	is an alias name, to which variables or functions can be assigned to. @see: https://docs.angularjs.org/guide/directive
\$inject	Dependency Injection list, it is resolved by angular and passing as an argument to constructor functions.

Section 17.1: Directive

```
interface IMyDirectiveController {
    // specify exposed controller methods and properties here
    getUrl(): string;
}

class MyDirectiveController implements IMyDirectiveController {
    // Inner injections, per each directive
    public static $inject = ["$location", "toaster"];

    constructor(private $location: ng.ILocationService, private toaster: any) {
        // $location and toaster are now properties of the controller
    }

    public getUrl(): string {
        return this.$location.url(); // utilize $location to retrieve the URL
    }
}

/*
 * Outer injections, for run once control.
 * For example we have all templates in one value, and we wan't to use it.
 */
export function myDirective(templatesUrl: ITemplates): ng.IDirective {
    return {
        controller: MyDirectiveController,
        controllerAs: "vm",

        link: (scope: ng.IScope,
               element: ng.IAugmentedJQuery,
               attributes: ng.IAttributes,
               controller: IMyDirectiveController): void => {

            let url = controller.getUrl();
            element.text("Current URL: " + url);

        },
        replace: true,
        require: "ngModel",
        restrict: "A",
        templateUrl: templatesUrl.myDirective,
    };
}

myDirective.$inject = [
    Templates.prototype.slug,
];
```

```
// Using slug naming across the projects simplifies change of the directive name
myDirective.prototype.slug = "myDirective";

// You can place this in some bootstrap file, or have them at the same file
angular.module("myApp").
  directive(myDirective.prototype.slug, myDirective);
```

Section 17.2: Simple example

```
export function myDirective($location: ng.ILocationService): ng.IDirective {
  return {

    link: (scope: ng.IScope,
           element: ng.IAugmentedJQuery,
           attributes: ng.IAttributes): void => {

      element.text("Current URL: " + $location.url());

    },

    replace: true,
    require: "ngModel",
    restrict: "A",
    templateUrl: templateUrl.myDirective,
  };
}

// Using slug naming across the projects simplifies change of the directive name
myDirective.prototype.slug = "myDirective";

// You can place this in some bootstrap file, or have them at the same file
angular.module("myApp").
  directive(myDirective.prototype.slug, [
    Templates.prototype.slug,
    myDirective
]);
```

Section 17.3: Component

For an easier transition to Angular 2, it's recommended to use Component, available since Angular 1.5.8

myModule.ts

```
import { MyModuleComponent } from "./components/myModuleComponent";
import { MyModuleService } from "./services/MyModuleService";

angular
  .module("myModule", [])
  .component("myModuleComponent", new MyModuleComponent())
  .service("myModuleService", MyModuleService);
```

components/myModuleComponent.ts

```
import IComponentOptions = angular.IComponentOptions;
import IControllerConstructor = angular.IControllerConstructor;
import Injectable = angular.Injectable;
import { MyModuleController } from "../controller/MyModuleController";

export class MyModuleComponent implements IComponentOptions {
```

```
public templateUrl: string = "./app/myModule/templates/myComponentTemplate.html";
public controller: Injectable<IControllerConstructor> = MyModuleController;
public bindings: {[boundProperty: string]: string} = {};
}
```

templates/myModuleComponent.html

```
<div class="my-module-component">
  {$ctrl.someContent}
</div>
```

controller/MyModuleController.ts

```
import IController = angular.IController;
import { MyModuleService } from "../services/MyModuleService";

export class MyModuleController implements IController {
  public static readonly $inject: string[] = ["$element", "myModuleService"];
  public someContent: string = "Hello World";

  constructor($element: JQuery, private myModuleService: MyModuleService) {
    console.log("element", $element);
  }

  public doSomething(): void {
    // implementation..
  }
}
```

services/MyModuleService.ts

```
export class MyModuleService {
  public static readonly $inject: string[] = [];

  constructor() {}

  public doSomething(): void {
    // do something
  }
}
```

somewhere.html

```
<my-module-component></my-module-component>
```

Chapter 18: TypeScript with SystemJS

Section 18.1: Hello World in the browser with SystemJS

Install systemjs and plugin-typescript

```
npm install systemjs
npm install plugin-typescript
```

NOTE: this will install typescript 2.0.0 compiler which is not released yet.

For TypeScript 1.8 you have to use plugin-typescript 4.0.16

Create hello.ts file

```
export function greeter(person: String) {
    return 'Hello, ' + person;
}
```

Create hello.html file

```
<!doctype html>
<html>
<head>
    <title>Hello World in TypeScript</title>
    <script src="node_modules/systemjs/dist/system.src.js"></script>

    <script src="config.js"></script>

    <script>
        window.addEventListener('load', function() {
            System.import('./hello.ts').then(function(hello) {
                document.body.innerHTML = hello greeter('World');
            });
        });
    </script>

</head>
<body>
</body>
</html>
```

Create config.js - SystemJS configuration file

```
System.config({
    packages: {
        "plugin-typescript": {
            "main": "plugin.js"
        },
        "typescript": {
            "main": "lib/typescript.js",
            "meta": {
                "lib/typescript.js": {
                    "exports": "ts"
                }
            }
        }
    }
})
```

```

},
map: {
  "plugin-typescript": "node_modules/plugin-typescript/lib/",
  /* NOTE: this is for npm 3 (node 6) */
  /* for npm 2, typescript path will be */
  /* node_modules/plugin-typescript/node_modules/typescript */
  "typescript": "node_modules/typescript/"
},
transpiler: "plugin-typescript",
meta: {
  "./hello.ts": {
    format: "esm",
    loader: "plugin-typescript"
  }
},
typescriptOptions: {
  typeCheck: 'strict'
}
});

```

NOTE: if you don't want type checking, remove `loader: "plugin-typescript"` and `typescriptOptions` from `config.js`. Also note that it will never check javascript code, in particular code in the `<script>` tag in html example.

Test it

```
npm install live-server
./node_modules/.bin/live-server --open=hello.html
```

Build it for production

```
npm install systemjs-builder
```

Create `build.js` file:

```
var Builder = require('systemjs-builder');
var builder = new Builder();
builder.loadConfig('./config.js').then(function() {
  builder.bundle('./hello.ts', './hello.js', {minify: true});
});
```

build `hello.js` from `hello.ts`

```
node build.js
```

Use it in production

Just load `hello.js` with a `script` tag before first use

`hello-production.html` file:

```
<!doctype html>
<html>
<head>
  <title>Hello World in TypeScript</title>
  <script src="node_modules/systemjs/dist/system.src.js"></script>

  <script src="config.js"></script>
  <script src="hello.js"></script>
```

```
<script>
  window.addEventListener('load', function() {
    System.import('./hello.ts').then(function(hello) {
      document.body.innerHTML = hello greeter('World');
    });
  });
</script>
```

```
</head>
<body>
</body>
</html>
```

Chapter 19: Unit Testing

Section 19.1: tape

[tape](#) is minimalistic JavaScript testing framework, it outputs [TAP-compliant](#) markup.

To install tape using npm run command

```
npm install --save-dev tape @types/tape
```

To use tape with Typescript you need to install ts-node as global package, to do this run command

```
npm install -g ts-node
```

Now you are ready to write your first test

```
//math.test.ts
import * as test from "tape";

test("Math test", (t) => {
  t.equal(4, 2 + 2);
  t.true(5 > 2 + 2);

  t.end();
});
```

To execute test run command

```
ts-node node_modules/tape/bin/tape math.test.ts
```

In output you should see

```
TAP version 13
# Math test
ok 1 should be equal
ok 2 should be truthy

1..2
# tests 2
# pass 2

# ok
```

Good job, you just ran your TypeScript test.

Run multiple test files

You can run multiple test files at once using path wildcards. To execute all Typescript tests in tests directory run command

```
ts-node node_modules/tape/bin/tape tests/**/*.ts
```

Section 19.2: jest (ts-jest)

[jest](#) is painless JavaScript testing framework by Facebook, with [ts-jest](#) can be used to test TypeScript code.

To install jest using npm run command

```
npm install --save-dev jest @types/jest ts-jest typescript
```

For ease of use install jest as global package

```
npm install -g jest
```

To make jest work with TypeScript you need to add configuration to package.json

```
//package.json
{
...
"jest": {
  "transform": {
    ".(ts|tsx)": "<rootDir>/node_modules/ts-jest/preprocessor.js"
  },
  "testRegex": "/__tests__/.*/\\.(test|spec)\\.(ts|tsx|js)$",
  "moduleFileExtensions": ["ts", "tsx", "js"]
}
}
```

Now jest is ready. Assume we have sample fizz buzz to test

```
//fizzBuzz.ts
export function fizzBuzz(n: number): string {
  let output = "";
  for (let i = 1; i <= n; i++) {
    if (i % 5 && i % 3) {
      output += i + ' ';
    }
    if (i % 3 === 0) {
      output += 'Fizz ';
    }
    if (i % 5 === 0) {
      output += 'Buzz ';
    }
  }
  return output;
}
```

Example test could look like

```
//FizzBuzz.test.ts
/// <reference types="jest" />

import {fizzBuzz} from "./fizzBuzz";
test("FizzBuzz test", () =>{
  expect(fizzBuzz(2)).toBe("1 2 ");
  expect(fizzBuzz(3)).toBe("1 2 Fizz ");
});
```

To execute test run

```
jest
```

In output you should see

```
PASS ./fizzBuzz.test.ts
? FizzBuzz test (3ms)

Test Suites: 1 passed, 1 total
Tests:       1 passed, 1 total
Snapshots:   0 total
Time:        1.46s, estimated 2s
Ran all test suites.
```

Code coverage

jest supports generation of code coverage reports.

To use code coverage with TypeScript you need to add another configuration line to package.json.

```
{
...
  "jest": {
    ...
      "testResultsProcessor": "<rootDir>/node_modules/ts-jest/coverageprocessor.js"
    }
}
```

To run tests with generation of coverage report run

```
jest --coverage
```

If used with our sample fizz buzz you should see

```
PASS ./fizzBuzz.test.ts
? FizzBuzz test (3ms)

-----|-----|-----|-----|-----|-----|
File    | % Stmt | % Branch | % Funcs | % Lines | Uncovered Lines |
-----|-----|-----|-----|-----|-----|
All files | 92.31 | 87.5 | 100 | 91.67 | 
  fizzBuzz.ts | 92.31 | 87.5 | 100 | 91.67 | 13 |
-----|-----|-----|-----|-----|-----|
Test Suites: 1 passed, 1 total
Tests:       1 passed, 1 total
Snapshots:   0 total
Time:        1.857s
Ran all test suites.
```

jest also created folder coverage which contains coverage report in various formats, including user friendly html report in coverage/lcov-report/index.html

All files

92.31% Statements 12/13 87.5% Branches 7/8 100% Functions 1/1 91.67% Lines 11/12



Section 19.3: Alsatian

[Alsatian](#) is a unit testing framework written in TypeScript. It allows for usage of Test Cases, and outputs [TAP-compliant](#) markup.

To use it, install it from npm:

```
npm install alsatian --save-dev
```

Then set up a test file:

```
import { Expect, Test, TestCase } from "alsatian";
import { SomeModule } from "../src/some-module";

export SomeModuleTests {

    @Test()
    public statusShouldBeTrueByDefault() {
        let instance = new SomeModule();

        Expect(instance.status).toBe(true);
    }

    @Test("Name should be null by default")
    public nameShouldBeNullByDefault() {
        let instance = new SomeModule();

        Expect(instance.name).toBe(null);
    }

    @TestCase("first name")
    @TestCase("apples")
    public shouldSetNameCorrectly(name: string) {
        let instance = new SomeModule();

        instance.setName(name);

        Expect(instance.name).toBe(name);
    }
}
```

For a full documentation, see [alsatian's GitHub repo](#).

Section 19.4: chai-immutable plugin

1. Install from npm chai, chai-immutable, and ts-node

```
npm install --save-dev chai chai-immutable ts-node
```

2. Install types for mocha and chai

```
npm install --save-dev @types/mocha @types/chai
```

3. Write simple test file:

```
import {List, Set} from 'immutable';
import * as chai from 'chai';
import * as chaiImmutable from 'chai-immutable';

chai.use(chaiImmutable);

describe('chai immutable example', () => {
  it('example', () => {
    expect(Set.of(1,2,3)).to.not.be.empty;

    expect(Set.of(1,2,3)).to.include(2);
    expect(Set.of(1,2,3)).to.include(5);
  })
})
```

4. Run it in the console:

```
mocha --compilers ts:ts-node/register,tsx:ts-node/register 'test/**/*.spec.(ts|tsx)'
```

Chapter 20: TSLint - assuring code quality and consistency

TSLint performs static analysis of code and detect errors and potential problems in code.

Section 20.1: Configuration for fewer programming errors

This tslint.json example contains a set of configuration to enforce more typings, catch common errors or otherwise confusing constructs that are prone to producing bugs and following more the [Coding Guidelines for TypeScript Contributors](#).

To enforce this rules, include tslint in your build process and check your code before compiling it with tsc.

```
{
  "rules": {
    // TypeScript Specific
    "member-access": true, // Requires explicit visibility declarations for class members.
    "no-any": true, // Disallows usages of any as a type declaration.
    // Functionality
    "label-position": true, // Only allows labels in sensible locations.
    "no-bitwise": true, // Disallows bitwise operators.
    "no-eval": true, // Disallows eval function invocations.
    "no-null-keyword": true, // Disallows use of the null keyword literal.
    "no-unsafe-finally": true, // Disallows control flow statements, such as return, continue,
    break and throws in finally blocks.
    "no-var-keyword": true, // Disallows usage of the var keyword.
    "radix": true, // Requires the radix parameter to be specified when calling parseInt.
    "triple-equals": true, // Requires === and !== in place of == and !=.
    "use-isnan": true, // Enforces use of the isNaN() function to check for NaN references instead
    of a comparison to the NaN constant.
    // Style
    "class-name": true, // Enforces PascalCased class and interface names.
    "interface-name": [ true, "never-prefix" ], // Requires interface names to begin with a capital
    'I'
    "no-angle-bracket-type-assertion": true, // Requires the use of as Type for type assertions
    instead of <Type>.
    "one-variable-per-declaration": true, // Disallows multiple variable definitions in the same
    declaration statement.
    "quotemark": [ true, "double", "avoid-escape" ], // Requires double quotes for string literals.
    "semicolon": [ true, "always" ], // Enforces consistent semicolon usage at the end of every
    statement.
    "variable-name": [ true, "ban-keywords", "check-format", "allow-leading-underscore" ] // Checks
    variable names for various errors. Disallows the use of certain TypeScript keywords (any, Number,
    number, String, string, Boolean, boolean, undefined) as variable or parameter. Allows only camelCased
    or UPPER_CASED variable names. Allows underscores at the beginning (only has an effect if "check-
    format" specified).
  }
}
```

Section 20.2: Installation and setup

To install [tslint](#) run command

```
npm install -g tslint
```

Tslint is configured via file `tslint.json`. To initialize default configuration run command

```
tslint --init
```

To check file for possible errors in file run command

```
tslint filename.ts
```

Section 20.3: Sets of TSLint Rules

- [tslint-microsoft-contrib](#)
- [tslint-eslint-rules](#)
- [codelyzer](#)

Yeoman generator supports all these presets and can be extends also:

- [generator-tslint](#)

Section 20.4: Basic tslint.json setup

This is a basic `tslint.json` setup which

- prevents use of any
- requires curly braces for `if/else/for/do/while` statements
- requires double quotes ("") to be used for strings

```
{
  "rules": {
    "no-any": true,
    "curly": true,
    "quotemark": [true, "double"]
  }
}
```

Section 20.5: Using a predefined ruleset as default

`tslint` can extend an existing rule set and is shipped with the defaults `tslint:recommended` and `tslint:latest`.

`tslint:recommended` is a stable, somewhat opinionated set of rules which we encourage for general TypeScript programming. This configuration follows semver, so it will not have breaking changes across minor or patch releases.

`tslint:latest` extends `tslint:recommended` and is continuously updated to include configuration for the latest rules in every TSLint release. Using this config may introduce breaking changes across minor releases as new rules are enabled which cause lint failures in your code. When TSLint reaches a major version bump, `tslint:recommended` will be updated to be identical to `tslint:latest`.

[Docs](#) and [source code of predefined ruleset](#)

So one can simply use:

```
{
  "extends": "tslint:recommended"
}
```

to have a sensible starting configuration.

One can then overwrite rules from that preset via `rules`, e.g. for node developers it made sense to set `no-console` to `false`:

```
{  
  "extends": "tslint:recommended",  
  "rules": {  
    "no-console": false  
  }  
}
```

Chapter 21: TypeScript basic examples

Section 21.1: 1 basic class inheritance example using extends and super keyword

A generic Car class has some car property and a description method

```
class Car{  
    name:string;  
    engineCapacity:string;  
  
    constructor(name:string, engineCapacity:string){  
        this.name = name;  
        this.engineCapacity = engineCapacity;  
    }  
  
    describeCar(){  
        console.log(` ${this.name} car comes with ${this.engineCapacity} displacement`);  
    }  
}  
  
new Car("maruti ciaz", "1500cc").describeCar();
```

HondaCar extends the existing generic car class and adds new property.

```
class HondaCar extends Car{  
    seatingCapacity:number;  
  
    constructor(name:string, engineCapacity:string, seatingCapacity:number){  
        super(name, engineCapacity);  
        this.seatingCapacity=seatingCapacity;  
    }  
  
    describeHondaCar(){  
        super.describeCar();  
        console.log(`this cars comes with seating capacity of ${this.seatingCapacity}`);  
    }  
}  
new HondaCar("honda jazz", "1200cc", 4).describeHondaCar();
```

Section 21.2: 2 static class variable example - count how many time method is being invoked

here countInstance is a static class variable

```
class StaticTest{  
    static countInstance : number= 0;  
    constructor(){  
        StaticTest.countInstance++;  
    }  
}  
  
new StaticTest();  
new StaticTest();  
console.log(StaticTest.countInstance);
```

Chapter 22: User-defined Type Guards

Section 22.1: Type guarding functions

You can declare functions that serve as type guards using any logic you'd like.

They take the form:

```
function functionName(variableName: any): variableName is DesiredType {  
    // body that returns boolean  
}
```

If the function returns true, TypeScript will narrow the type to DesiredType in any block guarded by a call to the function.

For example ([try it](#)):

```
function isString(test: any): test is string {  
    return typeof test === "string";  
}  
  
function example(foo: any) {  
    if (isString(foo)) {  
        // foo is type as a string in this block  
        console.log("it's a string: " + foo);  
    } else {  
        // foo is type any in this block  
        console.log("don't know what this is! [" + foo + "]");  
    }  
}  
  
example("hello world");           // prints "it's a string: hello world"  
example({ something: "else" });   // prints "don't know what this is! [[object Object]]"
```

A guard's function type predicate (the `foo is Bar` in the function return type position) is used at compile time to narrow types, the function body is used at runtime. The type predicate and function must agree, or your code won't work.

Type guard functions don't have to use `typeof` or `instanceof`, they can use more complicated logic.

For example, this code determines if you've got a jQuery object by checking for its version string.

```
function isjQuery(foo): foo is JQuery {  
    // test for jQuery's version string  
    return foo.jquery !== undefined;  
}  
  
function example(foo) {  
    if (isjQuery(foo)) {  
        // foo is typed JQuery here  
        foo.eq(0);  
    }  
}
```

Section 22.2: Using instanceof

`instanceof` requires that the variable is of type `any`.

This code ([try it](#)):

```
class Pet {}  
class Dog extends Pet {  
    bark() {  
        console.log("woof");  
    }  
}  
class Cat extends Pet {  
    purr() {  
        console.log("meow");  
    }  
}  
  
function example(foo: any) {  
    if (foo instanceof Dog) {  
        // foo is type Dog in this block  
        foo.bark();  
    }  
  
    if (foo instanceof Cat) {  
        // foo is type Cat in this block  
        foo.purr();  
    }  
}  
  
example(new Dog());  
example(new Cat());
```

prints

```
woof  
meow
```

to the console.

Section 22.3: Using typeof

`typeof` is used when you need to distinguish between types `number`, `string`, `boolean`, and `symbol`. Other string constants will not error, but won't be used to narrow types either.

Unlike `instanceof`, `typeof` will work with a variable of any type. In the example below, `foo` could be typed as `number` | `string` without issue.

This code ([try it](#)):

```
function example(foo: any) {  
    if (typeof foo === "number") {  
        // foo is type number in this block  
        console.log(foo + 100);  
    }  
  
    if (typeof foo === "string") {  
        // foo is type string in this block  
    }  
}
```

```
    console.log("not a number: " + foo);
}
}

example(23);
example("foo");
```

prints

```
123
not a number: foo
```

Chapter 23: How to use a javascript library without a type definition file

While some existing JavaScript libraries have [type definition files](#), there are many that don't.

TypeScript offers a couple patterns to handle missing declarations.

Section 23.1: Make a module that exports a default any

For more complicated projects, or in cases where you intend to gradually type a dependency, it may be cleaner to create a module.

Using JQuery (although it [does have typings available](#)) as an example:

```
// place in jquery.d.ts
declare let $: any;
export default $;
```

And then in any file in your project, you can import this definition with:

```
// some other .ts file
import $ from "jquery";
```

After this import, \$ will be typed as any.

If the library has multiple top-level variables, export and import by name instead:

```
// place in jquery.d.ts
declare module "jquery" {
  let $: any;
  let jQuery: any;

  export { $ };
  export { jQuery };
}
```

You can then import and use both names:

```
// some other .ts file
import {$, jQuery} from "jquery";

$.doThing();
jQuery.doOtherThing();
```

Section 23.2: Declare an any global

It is sometimes easiest to just declare a global of type any, especially in simple projects.

If JQuery didn't have type declarations ([it does](#)), you could put

```
declare var $: any;
```

Now any use of \$ will be typed any.

Section 23.3: Use an ambient module

If you just want to indicate the *intent* of an import (so you don't want to declare a global) but don't wish to bother with any explicit definitions, you can import an ambient module.

```
// in a declarations file (like declarations.d.ts)
declare module "jquery";      // note that there are no defined exports
```

You can then import from the ambient module.

```
// some other .ts file
import {$, jQuery} from "jquery";
```

Anything imported from the declared module (like \$ and jQuery) above will be of type any

Chapter 24: Modules - exporting and importing

Section 24.1: Hello world module

```
//hello.ts
export function hello(name: string){
    console.log(`Hello ${name}!`);
}
function helloES(name: string){
    console.log(`Hola ${name}!`);
}
export {helloES};
export default hello;
```

Load using directory index

If directory contains file named `index.ts` it can be loaded using only directory name (for `index.ts` filename is optional).

```
//welcome/index.ts
export function welcome(name: string){
    console.log(`Welcome ${name}!`);
}
```

Example usage of defined modules

```
import {hello, helloES} from "./hello"; // load specified elements
import defaultHello from "./hello"; // load default export into name defaultHello
import * as Bundle from "./hello"; // load all exports as Bundle
import {welcome} from "./welcome"; // note index.ts is omitted

hello("World"); // Hello World!
helloES("Mundo"); // Hola Mundo!
defaultHello("World"); // Hello World!

Bundle.hello("World"); // Hello World!
Bundle.helloES("Mundo"); // Hola Mundo!

welcome("Human"); // Welcome Human!
```

Section 24.2: Re-export

TypeScript allow to re-export declarations.

```
//Operator.ts
interface Operator {
    eval(a: number, b: number): number;
}
export default Operator;

//Add.ts
import Operator from "./Operator";
export class Add implements Operator {
    eval(a: number, b: number): number {
        return a + b;
    }
}
```

```

}

//Mul.ts
import Operator from "./Operator";
export class Mul implements Operator {
    eval(a: number, b: number): number {
        return a * b;
    }
}

```

You can bundle all operations in single library

```

//Operators.ts
import {Add} from "./Add";
import {Mul} from "./Mul";

export {Add, Mul};

```

Named declarations can be re-exported using shorter syntax

```

//NamedOperators.ts
export {Add} from "./Add";
export {Mul} from "./Mul";

```

Default exports can also be exported, but no short syntax is available. Remember, only one default export per module is possible.

```

//Calculator.ts
export {Add} from "./Add";
export {Mul} from "./Mul";
import Operator from "./Operator";

export default Operator;

```

Possible is re-export of **bundled import**

```

//RepackedCalculator.ts
export * from "./Operators";

```

When re-exporting bundle, declarations may be overridden when declared explicitly.

```

//FixedCalculator.ts
export * from "./Calculator"
import Operator from "./Calculator";
export class Add implements Operator {
    eval(a: number, b: number): number {
        return 42;
    }
}

```

Usage example

```

//run.ts
import {Add, Mul} from "./FixedCalculator";

const add = new Add();
const mul = new Mul();

```

```
console.log(add.eval(1, 1)); // 42
console.log(mul.eval(3, 4)); // 12
```

Section 24.3: Exporting/Importing declarations

Any declaration (variable, const, function, class, etc.) can be exported from module to be imported in other module.

TypeScript offers two export types: named and default.

Named export

```
// adams.ts
export function hello(name: string){
    console.log(`Hello ${name}!`);
}
export const answerToLifeTheUniverseAndEverything = 42;
export const unused = 0;
```

When importing named exports, you can specify which elements you want to import.

```
import {hello, answerToLifeTheUniverseAndEverything} from "./adams";
hello(answerToLifeTheUniverseAndEverything); // Hello 42!
```

Default export

Each module can have one default export

```
// dent.ts
const defaultValue = 54;
export default defaultValue;
```

which can be imported using

```
import dentValue from "./dent";
console.log(dentValue); // 54
```

Bundled import

TypeScript offers method to import whole module into variable

```
// adams.ts
export function hello(name: string){
    console.log(`Hello ${name}!`);
}
export const answerToLifeTheUniverseAndEverything = 42;
import * as Bundle from "./adams";
Bundle.hello(Bundle.answerToLifeTheUniverseAndEverything); // Hello 42!
console.log(Bundle.unused); // 0
```

Chapter 25: Why and when to use TypeScript

If you find the arguments for type systems persuasive in general, then you'll be happy with TypeScript.

It brings many of the advantages of type system (safety, readability, improved tooling) to the JavaScript ecosystem. It also suffers from some of the drawbacks of type systems (added complexity and incompleteness).


Section 25.1: Safety

TypeScript catches type errors early through static analysis:

```
function double(x: number): number {
  return 2 * x;
}
double('2');
//    ~~ Argument of type '"2"' is not assignable to parameter of type 'number'.
```

Section 25.2: Readability

TypeScript enables editors to provide contextual documentation:

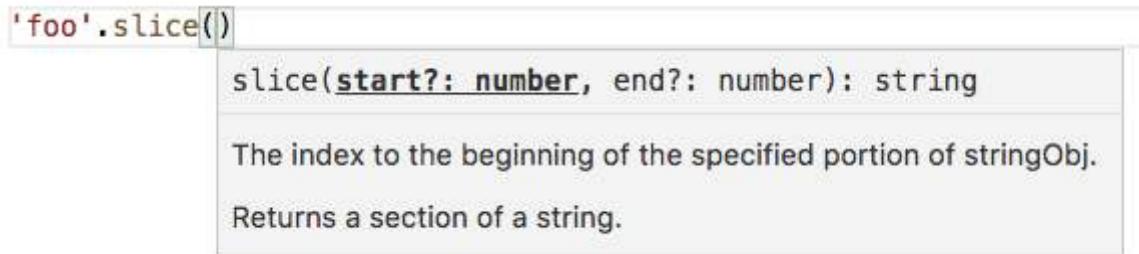

You'll never forget whether `String.prototype.slice` takes `(start, stop)` or `(start, length)` again!

Section 25.3: Tooling

TypeScript allows editors to perform automated refactors which are aware of the rules of the languages.

```
let foo = '123';

{
  const foo = (x: number) => {
    return 2 * x;
  }

  foo(2);
}
```

Here, for instance, Visual Studio Code is able to rename references to the inner `foo` without altering the outer `foo`. This would be difficult to do with a simple find/replace.

Chapter 26: Debugging

There are two ways of running and debugging TypeScript:

Transpile to JavaScript, run in node and use mappings to link back to the TypeScript source files

or

Run TypeScript directly using [ts-node](#)


This article describes both ways using [Visual Studio Code](#) and [WebStorm](#). All examples presume that your main file is *index.ts*.

Section 26.1: TypeScript with ts-node in WebStorm


Add this script to your package.json:

```
"start:idea": "ts-node %NODE_DEBUG_OPTION% --ignore false index.ts",
```

Right click on the script and select *Create 'test:idea'...* and confirm with 'OK' to create the debug configuration:

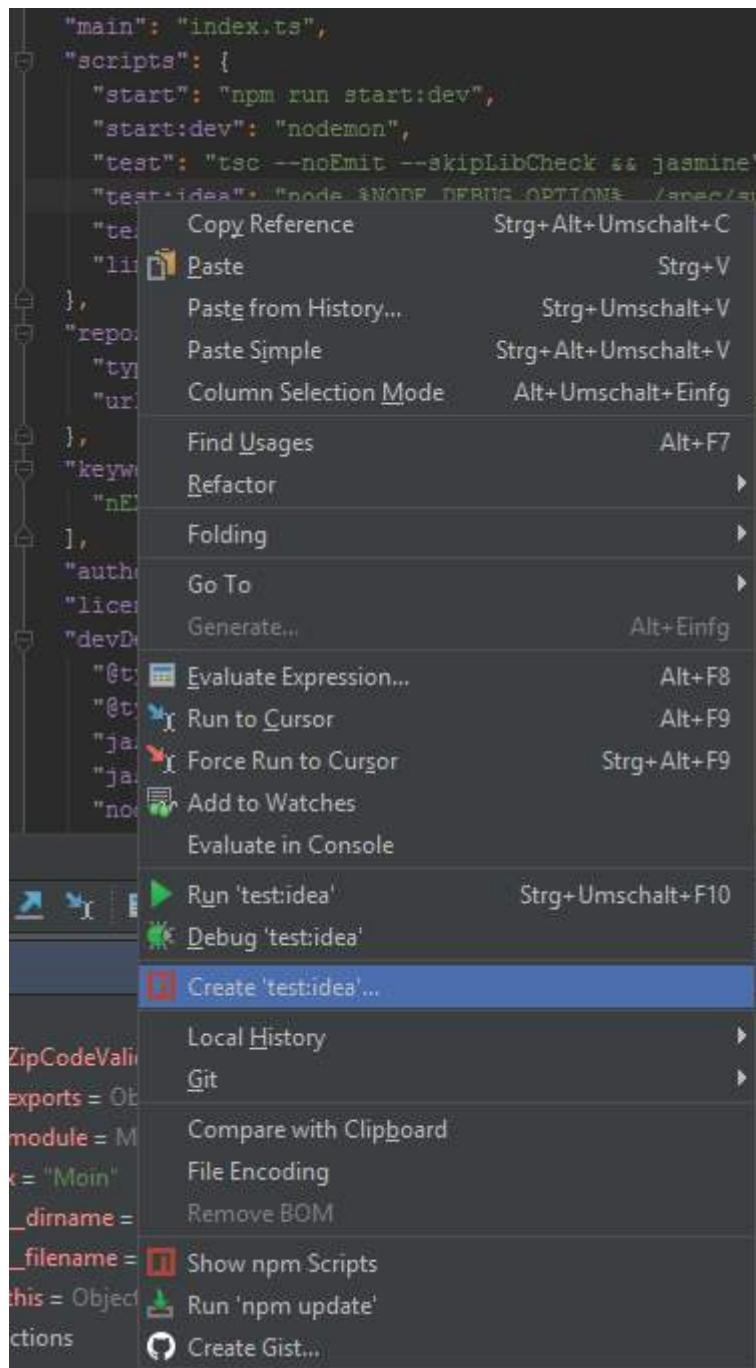

Start the debugger using this configuration:

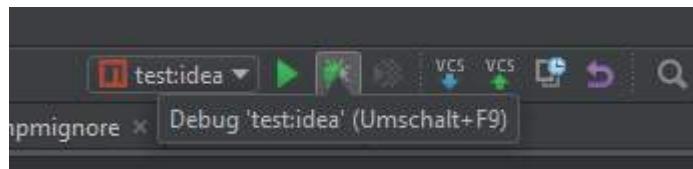

Section 26.2: TypeScript with ts-node in Visual Studio Code

Add ts-node to your TypeScript project:

```
npm i ts-node
```

Add a script to your package.json:

```
"start:debug": "ts-node --inspect=5858 --debug-brk --ignore false index.ts"
```

The `launch.json` needs to be configured to use the `node2` type and start npm running the `start:debug` script:

```
{  
  "version": "0.2.0",  
  "configurations": [  
    {  
      "type": "node2",  
      "request": "launch",  
      "name": "Launch Program",  
      "runtimeExecutable": "npm",  
      "windows": {  
        "runtimeExecutable": "npm.cmd"  
      },  
      "runtimeArgs": [  
        "run-script",  
        "start:debug"  
      ],  
      "cwd": "${workspaceRoot}/server",  
      "outFiles": [],  
      "port": 5858,  
      "sourceMaps": true  
    }  
  ]  
}
```

Section 26.3: JavaScript with SourceMaps in Visual Studio Code

In the `tsconfig.json` set

```
"sourceMap": true,
```

to generate mappings alongside with js-files from the TypeScript sources using the `tsc` command.


The [launch.json](#) file:

```
{  
  "version": "0.2.0",  
  "configurations": [  
    {  
      "type": "node",  
      "request": "launch",  
      "name": "Launch Program",  
      "program": "${workspaceRoot}\\index.js",  
      "cwd": "${workspaceRoot}",  
      "outFiles": [],  
      "sourceMaps": true  
    }  
  ]  
}
```

This starts node with the generated index.js (if your main file is index.ts) file and the debugger in Visual Studio Code which halts on breakpoints and resolves variable values within your TypeScript code.

Section 26.4: JavaScript with SourceMaps in WebStorm

Create a `Node.js` [debug configuration](#) and use `index.js` as `Node parameters`.

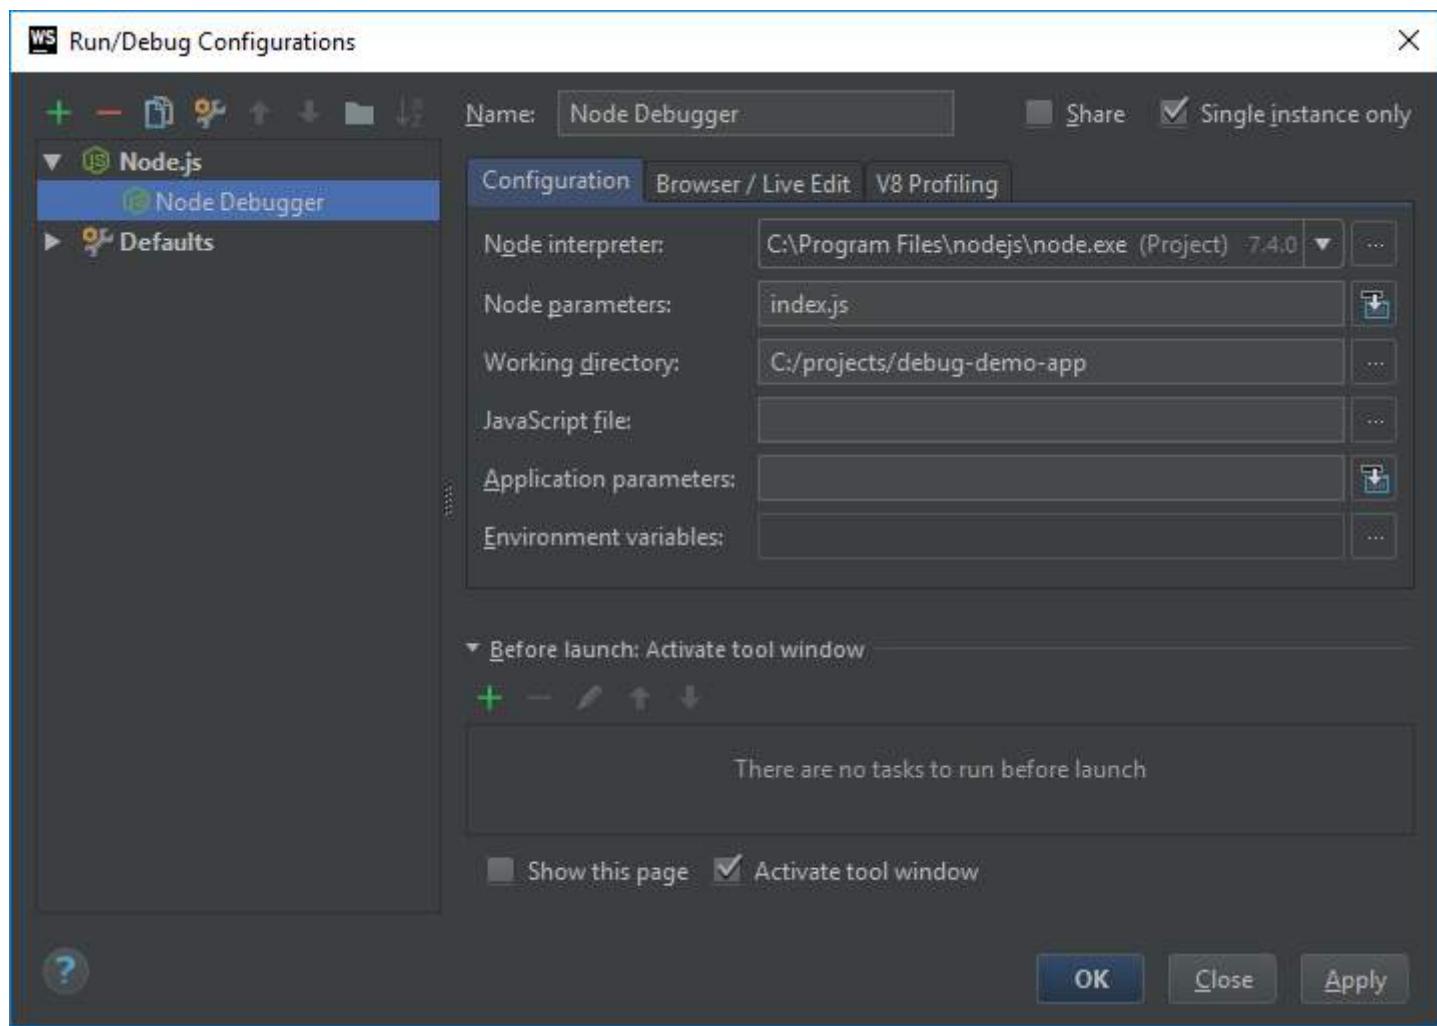

Chapter 27: Arrays

Section 27.1: Finding Object in Array

Using `find()`

```
const inventory = [
  {name: 'apples', quantity: 2},
  {name: 'bananas', quantity: 0},
  {name: 'cherries', quantity: 5}
];

function findCherries(fruit) {
  return fruit.name === 'cherries';
}

inventory.find(findCherries); // { name: 'cherries', quantity: 5 }

/* OR */

inventory.find(e => e.name === 'apples'); // { name: 'apples', quantity: 2 }
```

Chapter 28: Typescript-installing-typescript-and-running-the-typescript-compiler-tsc

How to install TypeScript and run the TypeScript compiler against a .ts file from the command line.

Section 28.1: Steps


Installing Typescript and running typescript compiler.

To install Typescript Comiler

```
npm install -g typescript
```

To check with the typescript version

```
tsc -v
```

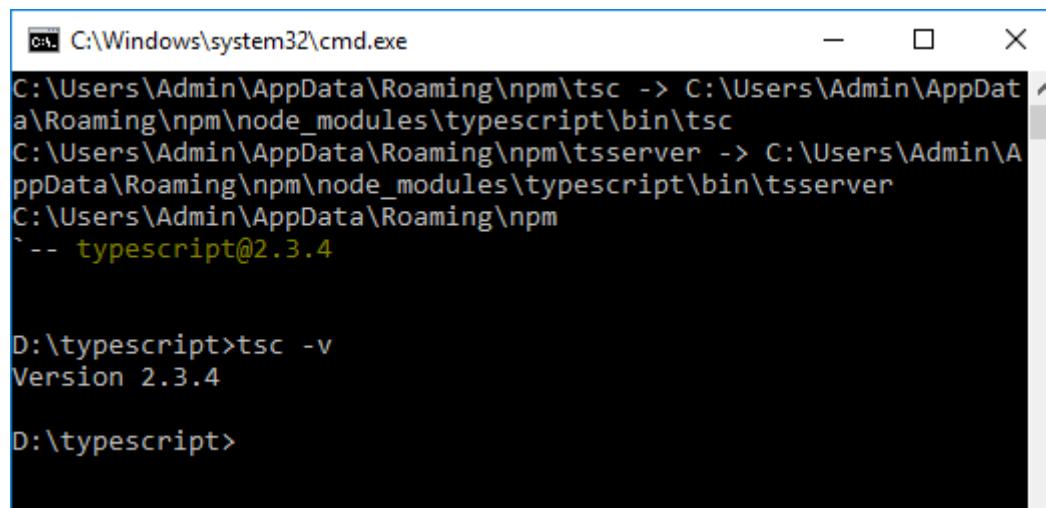

The screenshot shows a Windows Command Prompt window with the title bar 'C:\Windows\system32\cmd.exe'. The window contains the following text:

```
C:\Users\Admin\AppData\Roaming\npm\tsc -> C:\Users\Admin\AppData\Roaming\npm\node_modules\typescript\bin\tsc
C:\Users\Admin\AppData\Roaming\npm\tsserver -> C:\Users\Admin\AppData\Roaming\npm\node_modules\typescript\bin\tsserver
C:\Users\Admin\AppData\Roaming\npm
`-- typescript@2.3.4

D:\typescript>tsc -v
Version 2.3.4

D:\typescript>
```

Download Visual Studio Code for Linux/Windows

[Visual Code Download Link](#)

1. Open Visual Studio Code
2. Open Same Folde where you have installed Typescript compiler
3. Add File by clicking on plus icon on left pane
4. Create a basic class.
5. Compile your type script file and generate output.

The screenshot shows the Visual Studio Code interface. On the left is the Explorer sidebar with icons for files, folders, and TypeScript. The main area has a 'Welcome' tab and an 'app.ts' editor tab. The 'app.ts' tab contains the following code:

```
1 class Person{}
```

An orange arrow points from the number 1 to the word 'class'. Below the editor is a terminal window titled 'C:\Windows\system32\cmd.exe' showing the command:

```
D:\typescript>tsc app.ts
```

Below the terminal is a status message:

```
D:\typescript> 3. Run compiler with file name
```

On the left side of the main area, there are four numbered steps:

1. Create File App.ts
2. Create a class
3. Run compiler with file name
4. Auto create compiled javascript file

See the result in compiled javascript of written typescript code.

The screenshot shows the Visual Studio Code interface. On the left is the Explorer sidebar with icons for files, folders, and TypeScript. The main area has a 'Welcome' tab and two editor tabs: 'app.ts' and 'app.js'. The 'app.js' tab contains the following code:

```
1 var Person = (function () {
2     function Person() {
3     }
4     return Person;
5 })();
6
```

Thank you.

Chapter 29: Configure typescript project to compile all files in typescript.

creating your first .tsconfig configuration file which will tell the TypeScript compiler how to treat your .ts files

Section 29.1: Typescript Configuration file setup

- Enter command "**tsc --init**" and hit enter.
- Before that we need to compile ts file with command "**tsc app.ts**" now it is all defined in below config file automatically.

The screenshot shows the Visual Studio Code interface. In the Explorer sidebar, there are two entries under 'OPEN EDITORS': 'Welcome' and 'tsconfig.json'. Under 'TYPESCRIPT', there is an 'app.ts' file and another 'tsconfig.json' file. The right-hand panel displays the contents of the 'tsconfig.json' file, which includes compiler options like target: 'es5', module: 'commonjs', and strict: true. Below the code editor is a terminal window showing a Windows command prompt. The user has entered 'cd typescript' to change the directory. Then, they run the command 'tsc --init', which generates a new 'tsconfig.json' file. A red callout box highlights this action with the text 'config file will be auto created to directory'.

```
1 {  
2   "compilerOptions": {  
3     /* Basic Options */  
4     "target": "es5",  
5     "module": "commonjs",  
6     "strict": true  
7   }  
8 }
```

```
Microsoft Windows [Version 10.0.15063]  
(c) 2017 Microsoft Corporation. All rights reserved.  
C:\Users\Admin>d:  
D:\>cd typescript  
D:\typescript>tsc --init  
message TS6071: Successfully created a tsconfig.json file.  
D:\typescript>
```

- Now, You can compile all typescripts by command "**tsc**". it will automatically create ".js" file of your typescript file.

The screenshot shows the Visual Studio Code interface. On the left is the Explorer pane, which displays the file structure. It shows a 'tsconfig.json' file, an 'app.js' file, and an 'app.ts' file. The 'app.ts' file is highlighted with a red box. In the center is the Editor pane, currently showing the 'app.ts' file. On the right is the Command Prompt pane, which shows the terminal output. The terminal shows the user navigating to a directory ('D:\typescript'), running the command 'tsc --init', and receiving a success message ('TS6071: Successfully').

- If you will create another typescript and hit "tsc" command in command prompt or terminal javascript file will be automatically created for typescript file.

Thank you,

Chapter 30: Using Typescript with RequireJS

RequireJS is a JavaScript file and module loader. It is optimized for in-browser use, but it can be used in other JavaScript environments, like Rhino and Node. Using a modular script loader like RequireJS will improve the speed and quality of your code.

Using TypeScript with RequireJS requires configuration of tsconfig.json, and including an snippet in any HTML file. Compiler will traduce imports from the syntax of TypeScript to RequireJS' format.

Section 30.1: HTML example using requireJS CDN to include an already compiled TypeScript file

```
<body onload="__init__();">
  ...
  <script src="http://requirejs.org/docs/release/2.3.2/comments/require.js"></script>
  <script>
    function __init__() {
      require(["view/index.js"]);
    }
  </script>
</body>
```

Section 30.2: tsconfig.json example to compile to view folder using requireJS import style

```
{
  "module": "amd",      // Using AMD module code generator which works with requireJS
  "rootDir": "./src",   // Change this to your source folder
  "outDir": "./view",
  ...
}
```

Credits

Thank you greatly to all the people from Stack Overflow Documentation who helped provide this content,
more changes can be sent to web@petercv.com for new content to be published or updated

2426021684	Chapters 1, 2 and 12
ABabin	Chapter 7
Alec Hansen	Chapter 1
Alex Filatov	Chapters 11 and 20
Almond	Chapter 2
Aminadav	Chapter 7
Aron	Chapter 7
artem	Chapters 2, 7 and 18
Blackus	Chapter 2
bnieldan	Chapter 14
br4d	Chapter 6
BrunoLM	Chapters 1, 8 and 11
Brutus	Chapter 2
ChanceM	Chapter 1
Cobus Kruger	Chapter 7
danvk	Chapters 1, 4 and 25
dimitrisli	Chapter 16
duplicator	Chapter 2
Equiman	Chapter 3
Fenton	Chapters 10 and 15
Florian Häammerle	Chapter 16
Fylax	Chapters 1, 10 and 14
goenning	Chapter 14
hansmaad	Chapters 3 and 9
Harry	Chapter 2
irakli khitarishvili	Chapters 5 and 8
islandman93	Chapters 1, 2, 5, 6 and 7
James Monger	Chapters 3, 19 and 20
JKillian	Chapters 2 and 4
Joel Day	Chapter 2
John Ruddell	Chapter 11
Joshua Breedon	Chapters 1 and 7
Justin Niles	Chapter 3
k0pernikus	Chapters 1 and 20
Kevin Montrose	Chapters 16, 22 and 23
KnottyOmo	Chapters 1, 2 and 9
Kuba Beránek	Chapter 1
Lekhnath	Chapter 1
leonidv	Chapter 19
lilezek	Chapter 30
Magu	Chapters 10, 14 and 20
Matt Lishman	Chapter 1
Matthew Harwood	Chapter 19
Mikhail	Chapters 1 and 10
mleko	Chapters 1, 11, 19, 20 and 24
Moriarty	Chapters 10 and 14
muetzerich	Chapter 6
Muhammad Awais	Chapter 9
Paul Boutes	Chapter 7

Peopleware	Chapter 26
Protectator	Chapter 11
Rahul	Chapters 28 and 29
Rajab Shakirov	Chapters 2 and 5
RationalDev	Chapters 1 and 10
Remo H. Jansen	Chapter 13
Robin	Chapter 3
Roman M. Koss	Chapter 17
Roy Dictus	Chapter 1
Saiful Azad	Chapters 1 and 7
Sam	Chapter 1
samAlvin	Chapter 1
SilentLupin	Chapter 6
Slava Shpitalny	Chapters 2, 6, 7 and 9
smnbbry	Chapter 16
Stefan Rein	Chapter 17
Sunnyok	Chapter 7
Taytay	Chapter 9
Udlej Nati	Chapter 27
user3893988	Chapter 14
vashishth	Chapter 21
Wasabi Fan	Chapter 1

You may also like

C# Notes for Professionals

700+ pages
of professional hints and tricks

GoalKicker.com
Free Programming Books

This is an unofficial free book created for educational purposes. It is not affiliated with Microsoft Corporation or its subsidiaries. All trademarks and registered trademarks are the property of their respective owners.

Disclaimer

CSS Notes for Professionals

200+ pages
of professional hints and tricks

GoalKicker.com
Free Programming Books

This is an unofficial free book created for educational purposes. It is not affiliated with Microsoft Corporation or its subsidiaries. All trademarks and registered trademarks are the property of their respective owners.

Disclaimer

AngularJS Notes for Professionals

100+ pages
of professional hints and tricks

GoalKicker.com
Free Programming Books

This is an unofficial free book created for educational purposes. It is not affiliated with Microsoft Corporation or its subsidiaries. All trademarks and registered trademarks are the property of their respective owners.

Disclaimer

HTML5 Notes for Professionals

100+ pages
of professional hints and tricks

GoalKicker.com
Free Programming Books

This is an unofficial free book created for educational purposes. It is not affiliated with Microsoft Corporation or its subsidiaries. All trademarks and registered trademarks are the property of their respective owners.

Disclaimer

Java Notes for Professionals

900+ pages
of professional hints and tricks

GoalKicker.com
Free Programming Books

This is an unofficial free book created for educational purposes. It is not affiliated with Microsoft Corporation or its subsidiaries. All trademarks and registered trademarks are the property of their respective owners.

Disclaimer

JavaScript™ Notes for Professionals

400+ pages
of professional hints and tricks

GoalKicker.com
Free Programming Books

This is an unofficial free book created for educational purposes. It is not affiliated with Microsoft Corporation or its subsidiaries. All trademarks and registered trademarks are the property of their respective owners.

Disclaimer

jQuery® Notes for Professionals

50+ pages
of professional hints and tricks

GoalKicker.com
Free Programming Books

This is an unofficial free book created for educational purposes. It is not affiliated with the jQuery Project or its contributors. All trademarks and registered trademarks are the property of their respective owners.

Disclaimer

Python® Notes for Professionals

700+ pages
of professional hints and tricks

GoalKicker.com
Free Programming Books

This is an unofficial free book created for educational purposes. It is not affiliated with the Python Software Foundation or its members. All trademarks and registered trademarks are the property of their respective owners.

Disclaimer

SQL Notes for Professionals

100+ pages
of professional hints and tricks

GoalKicker.com
Free Programming Books

This is an unofficial free book created for educational purposes. It is not affiliated with Microsoft Corporation or its subsidiaries. All trademarks and registered trademarks are the property of their respective owners.

Disclaimer